

* 20 FEET IS THE STANDARD CABLE LENGTH.
FOR A DIFFERENT LENGTH, ADD A DASH AND LENGTH AFTER THE NUMBER.

WARNING THE PRESS, SHEAR, PRESS BRAKE, ETC. MUST BE EQUIPPED WITH A POINT OF OPERATION DEVICE AND SHALL BE INTERLOCKED INTO THE FEEDER CONTROL CIRCUIT TO PREVENT OR STOP MOTION WHEN THE INTERLOCK CIRCUIT IS INTERRUPTED.




15 FEET OF 2 CONDUCTOR
SHIELDED CABLE SUPPLIED
BY CWP FOR FEED INITIATE


— — — — —

FEED —


CUSTOMER SUPPLIED
FEED INITIATE DEVICE

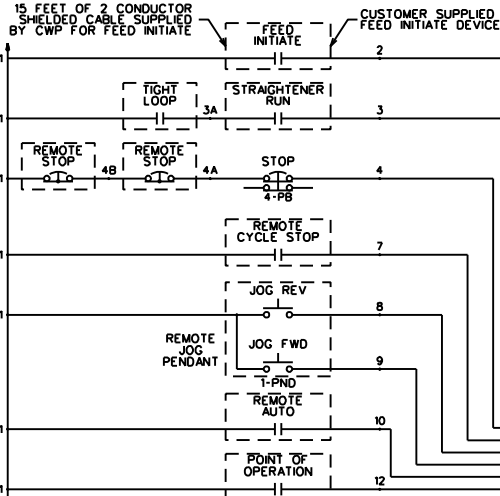



NOTE: RELAY OR SOLENOID COILS
MUST BE SUPPRESSED AS SHOWN

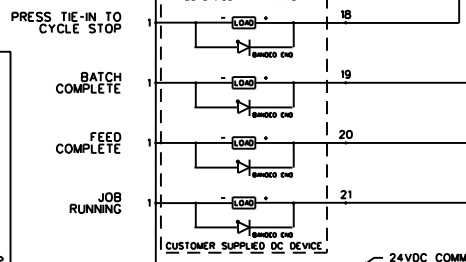

STANDARD INPUT SUPPLY VOLTAGE
DRIVE #13960 - MDH2A07TR-RN2

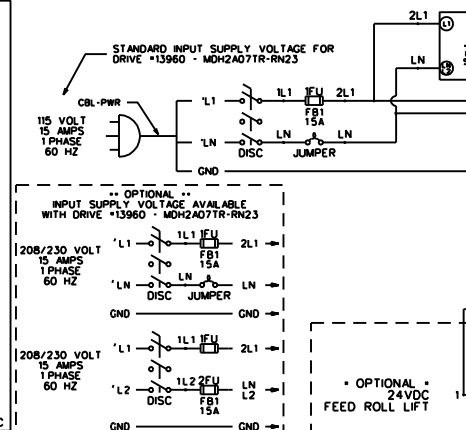

• OPTIONAL •
24VDC

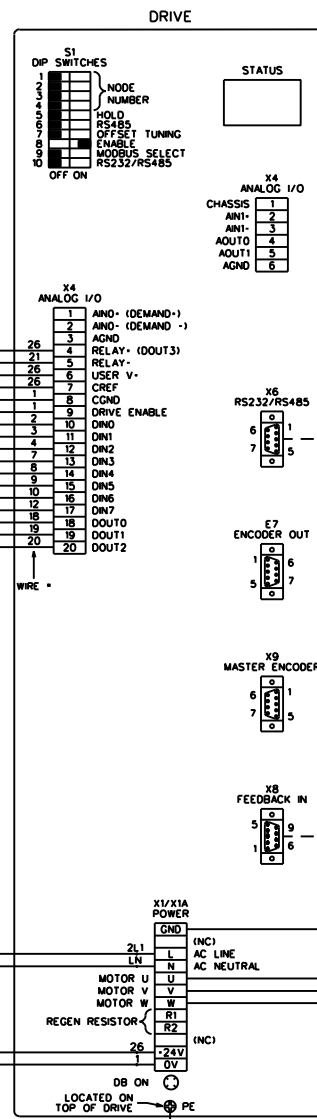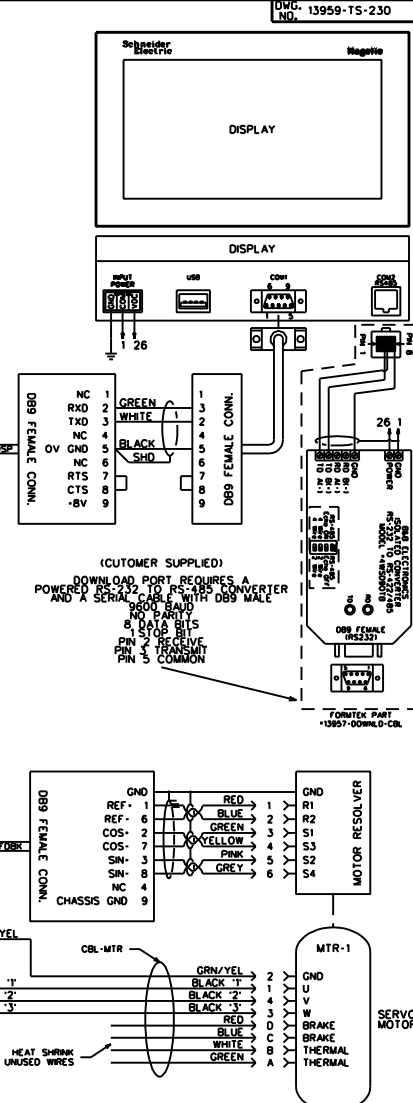[illegible]

DATE	REV			DATE	REV
5/11	JRT			13933-RPD	1
DWG. NO.		13959-TS-230		REV	2
				DATE	0