
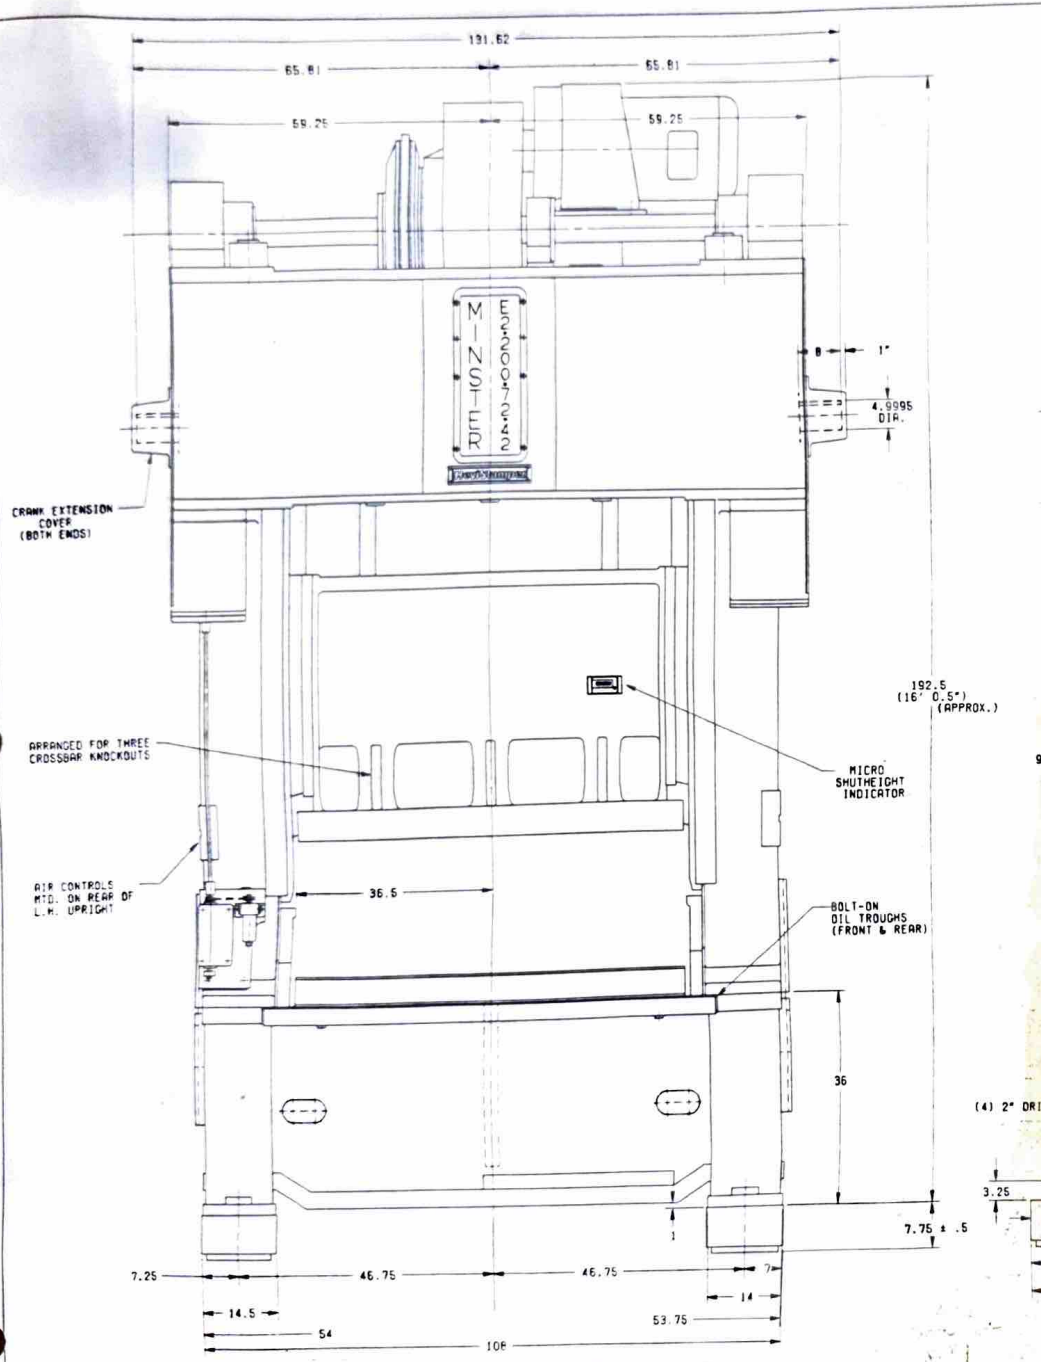


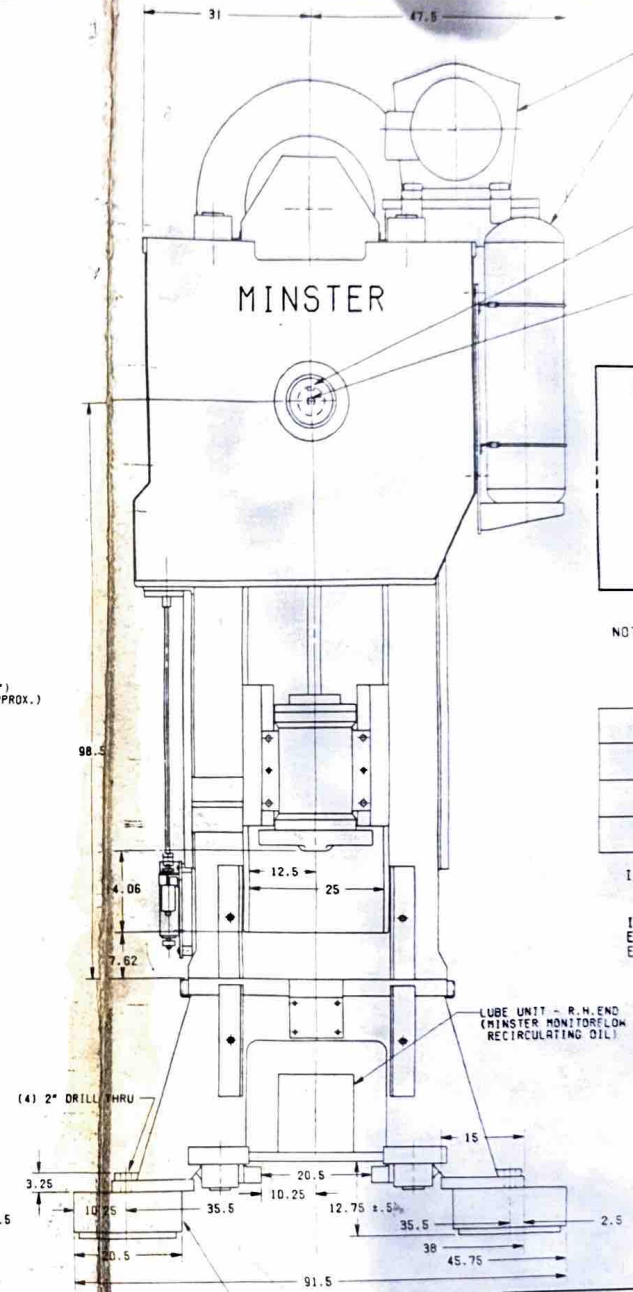

E2-200-72 X 42	PRESS
CAPACITY	200 TONS
STROKE	10 IN.
ADJUSTMENT	6 IN.
STROKES PER MINUTE	0-60 S.P.M.
USEABLE ENERGY @ 30 S.P.M.= 46 IN. TONS	
MAX. USABLE ENERGY FROM 47 TO 60 S.P.M.= 114 IN. TONS	

NOTE: PRESS MAY BE SINGLE STROKED AS NOTED BELOW. A HIGHER RATE OF SGL. STROKING MAY CAUSE EXCESSIVE MAINTENANCE OF CLUTCH & BRAKE.

CONTINUOUS SPM	SGL. STROKE SPM
30	30
45	26
60	18

INCLUDES EXHAUST MUFFLER ON CLUTCH VALVE.

INCLUDES AIR OPERATED FLYWHEEL BRAKE, ELECTRICALLY INTERLOCKED SO BRAKE WILL ENGAGE WHEN MAIN MOTOR IS STOPPED.

EST. WT.	UNLESS OTHERWISE SPECIFIED	LAST REVISION DATE 8-22-88	CHANGED BY FJH
BASIC PART NO. E2-200-72-003-2000	DIMENSION / TOLERANCE: X AND X.X ±.010; X.XX ±.010; X.XXX ±.001; X.XXXX ±.0005	THE MINSTER MACHINE CO.	
REFERENCE NO.	FINISH 125 MICROINCHES OR AS SHOWN	DATE 2-15-88	DRAWN BY KUNKLE
SUPERSEDED BY		CHECKED BY AHRNS	
SUPERSEDES		NAME OF PART GENERAL ASSEMBLY	
		MATERIAL	PART NO.
		REQ. NEED ID	PART NO. V-1157-328