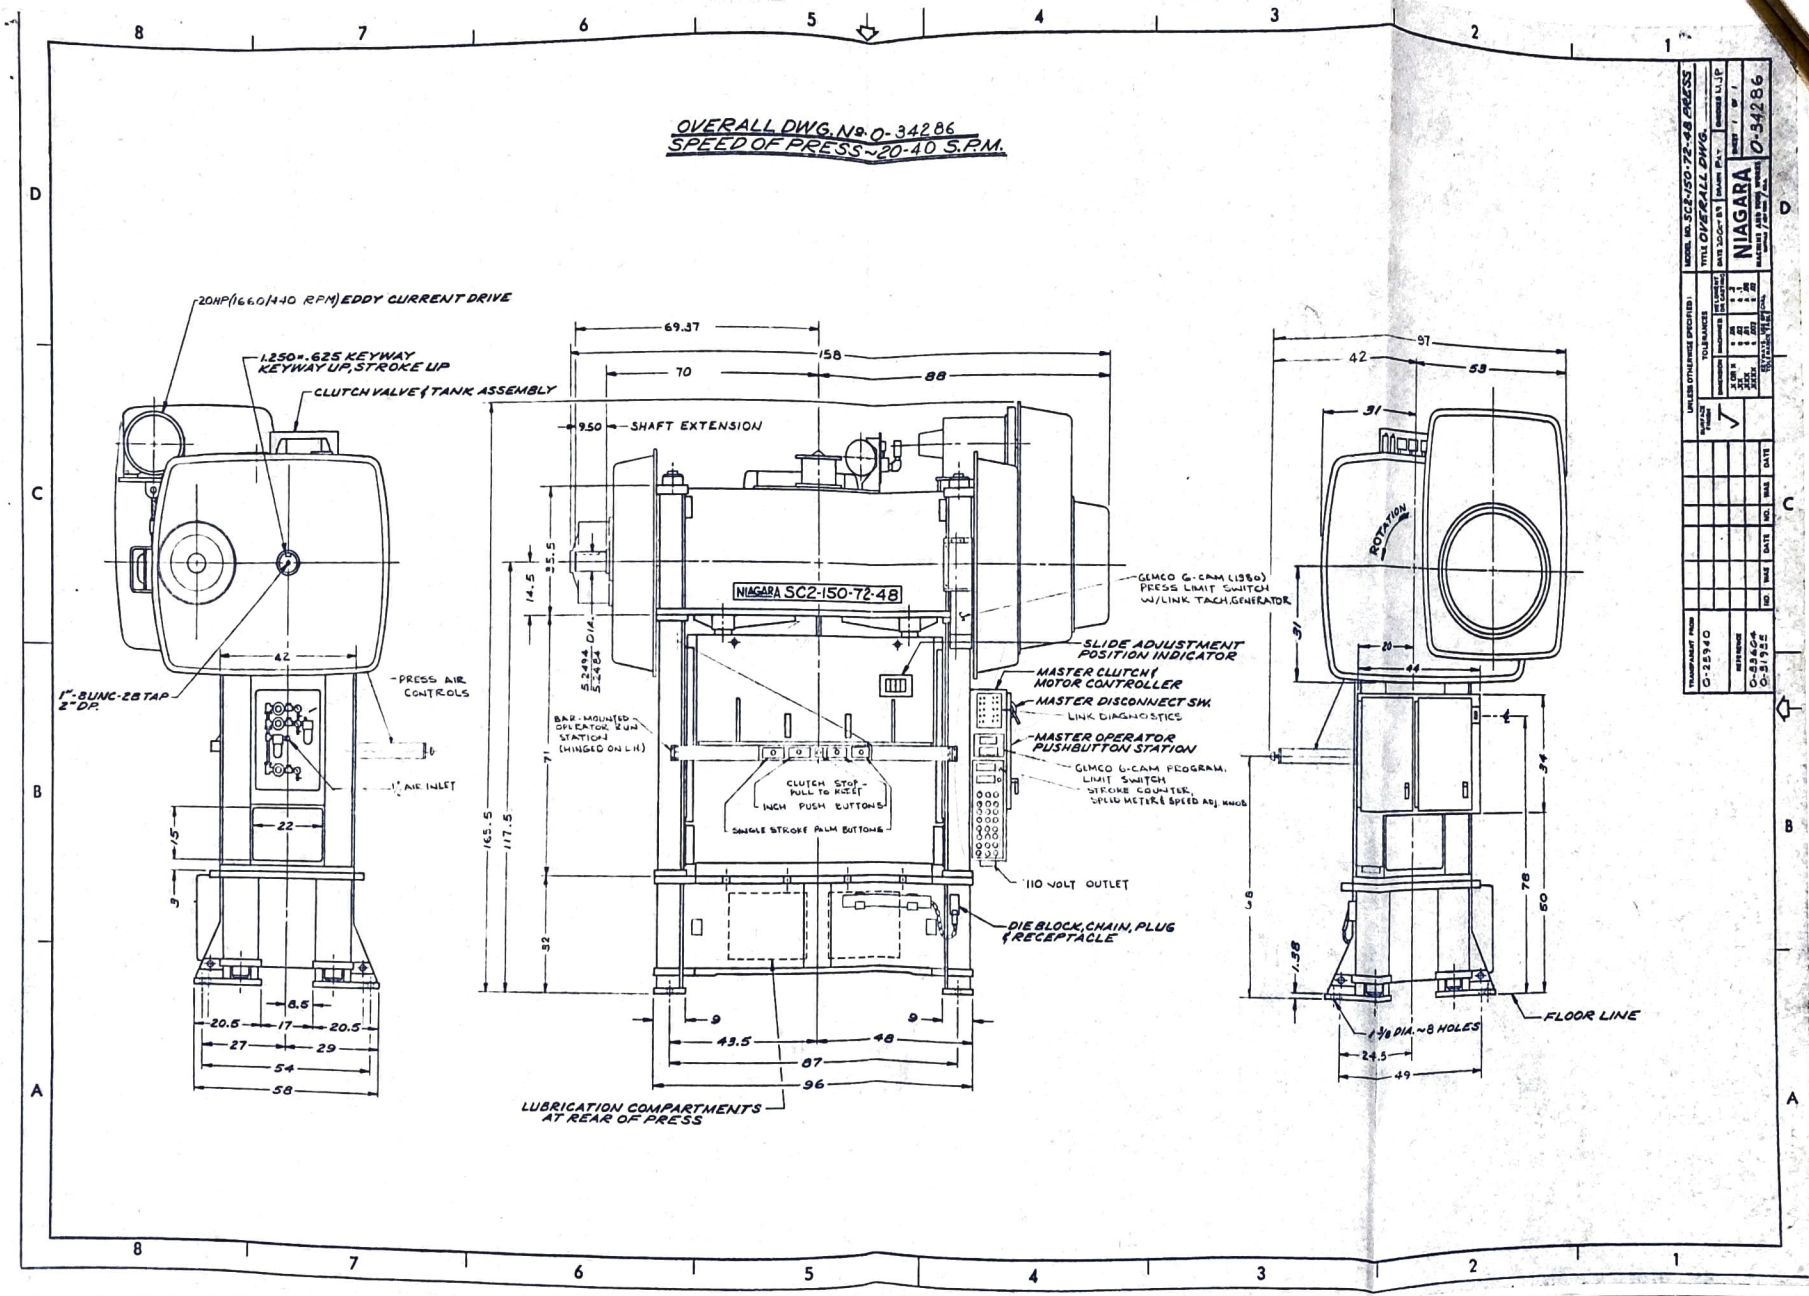
OVERALL DWG. No. 0-34286
SPEED OF PRESS ~ 20-40 S.P.M.
20HP (1660/440 RPM) EDDY CURRENT DRIVE
1.250 × .625 KEYWAY KEYWAY UP, STROKE UP
CLUTCH VALVE & TANK ASSEMBLY
1"-8UNC-2B TAP 2" DP.
PRESS AIR CONTROLS
1" AIR INLET
SHAFT EXTENSION
NIAGARA SC2-150-72-48
5.2494 / 5.2484 DIA.
BAR-MOUNTED OPERATOR RUN STATION (HINGED ON LH)
CLUTCH STOP - PULL TO RESET
INCH PUSH BUTTONS
SINGLE STROKE PALM BUTTONS
GEMCO 6-CAM (1380) PRESS LIMIT SWITCH W/LINK TACH. GENERATOR
SLIDE ADJUSTMENT POSITION INDICATOR
MASTER CLUTCH & MOTOR CONTROLLER
MASTER DISCONNECT SW.
LINK DIAGNOSTICS
MASTER OPERATOR PUSHBUTTON STATION
GEMCO 6-CAM PROGRAM. LIMIT SWITCH
STROKE COUNTER, SPEED METER & SPEED ADJ. KNOB
110 VOLT OUTLET
DIE BLOCK, CHAIN, PLUG & RECEPTACLE
LUBRICATION COMPARTMENTS AT REAR OF PRESS
ROTATION
FLOOR LINE
1 3/8 DIA. ~ 8 HOLES
MODEL NO. SC2-150-72-48 PRESS
TITLE OVERALL DWG.
NIAGARA
0-34286
TRANSPARENT FROM 0-25940
REFERENCE 0-33664 0-31955