
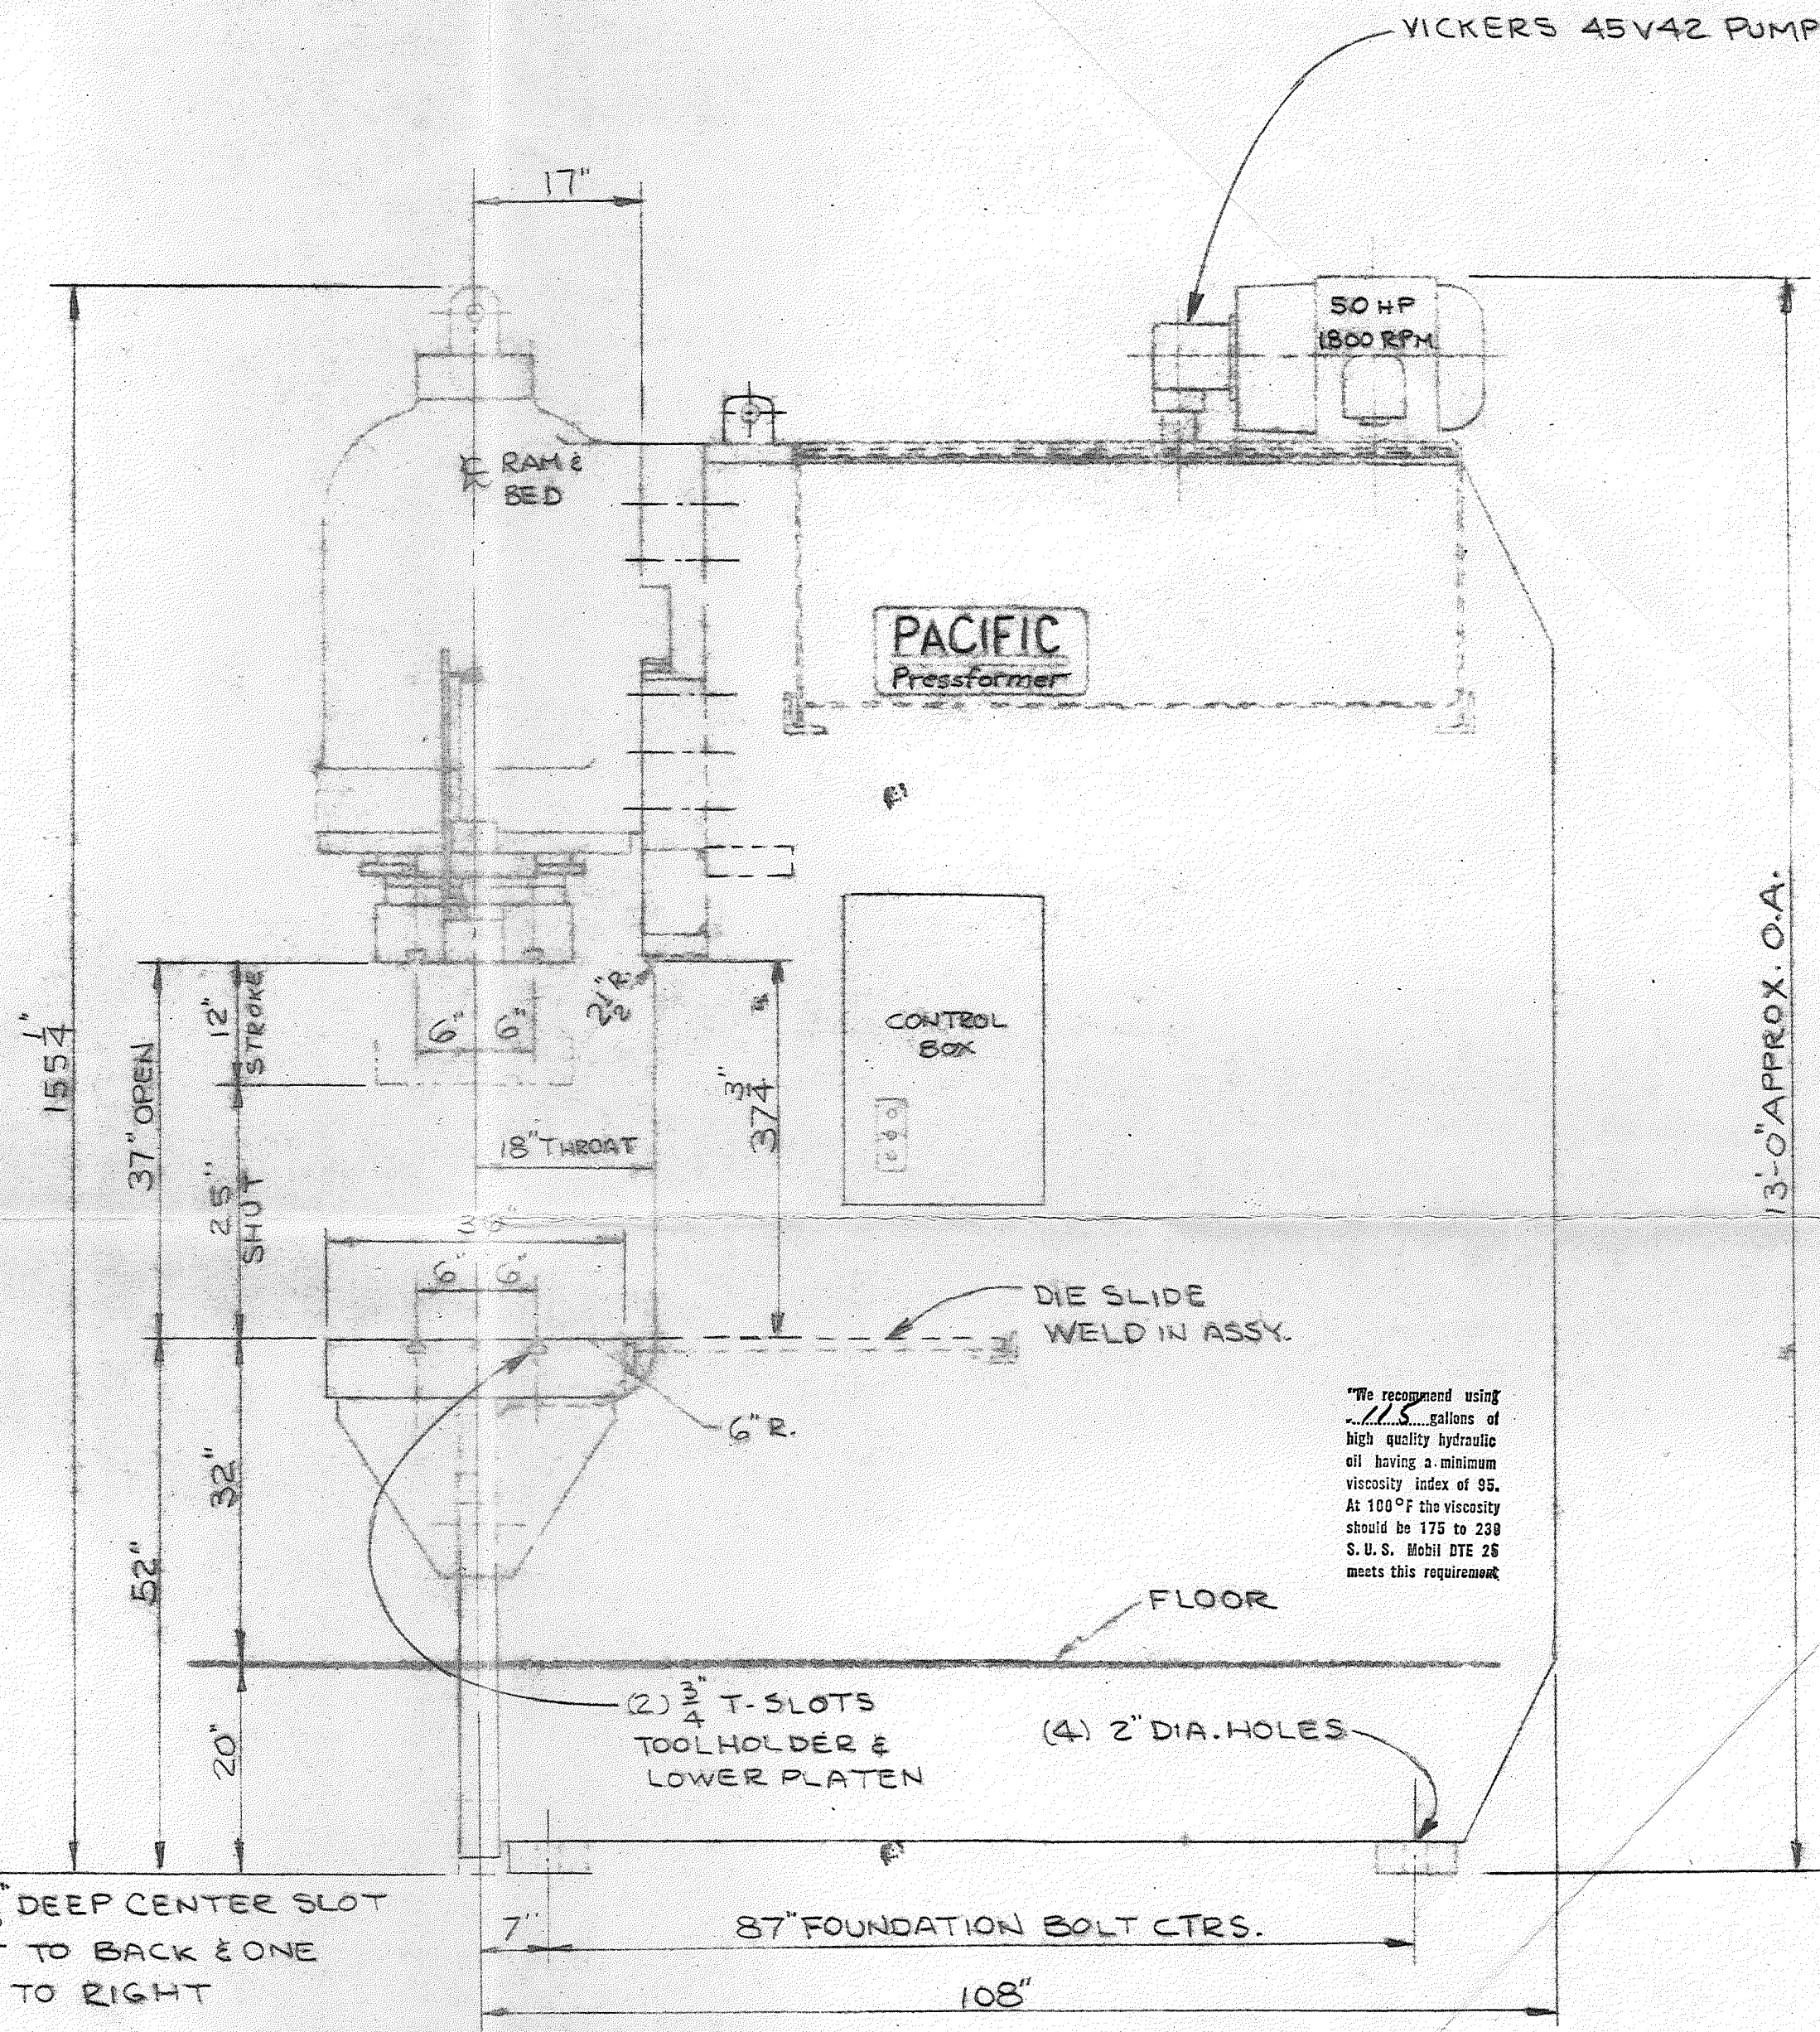


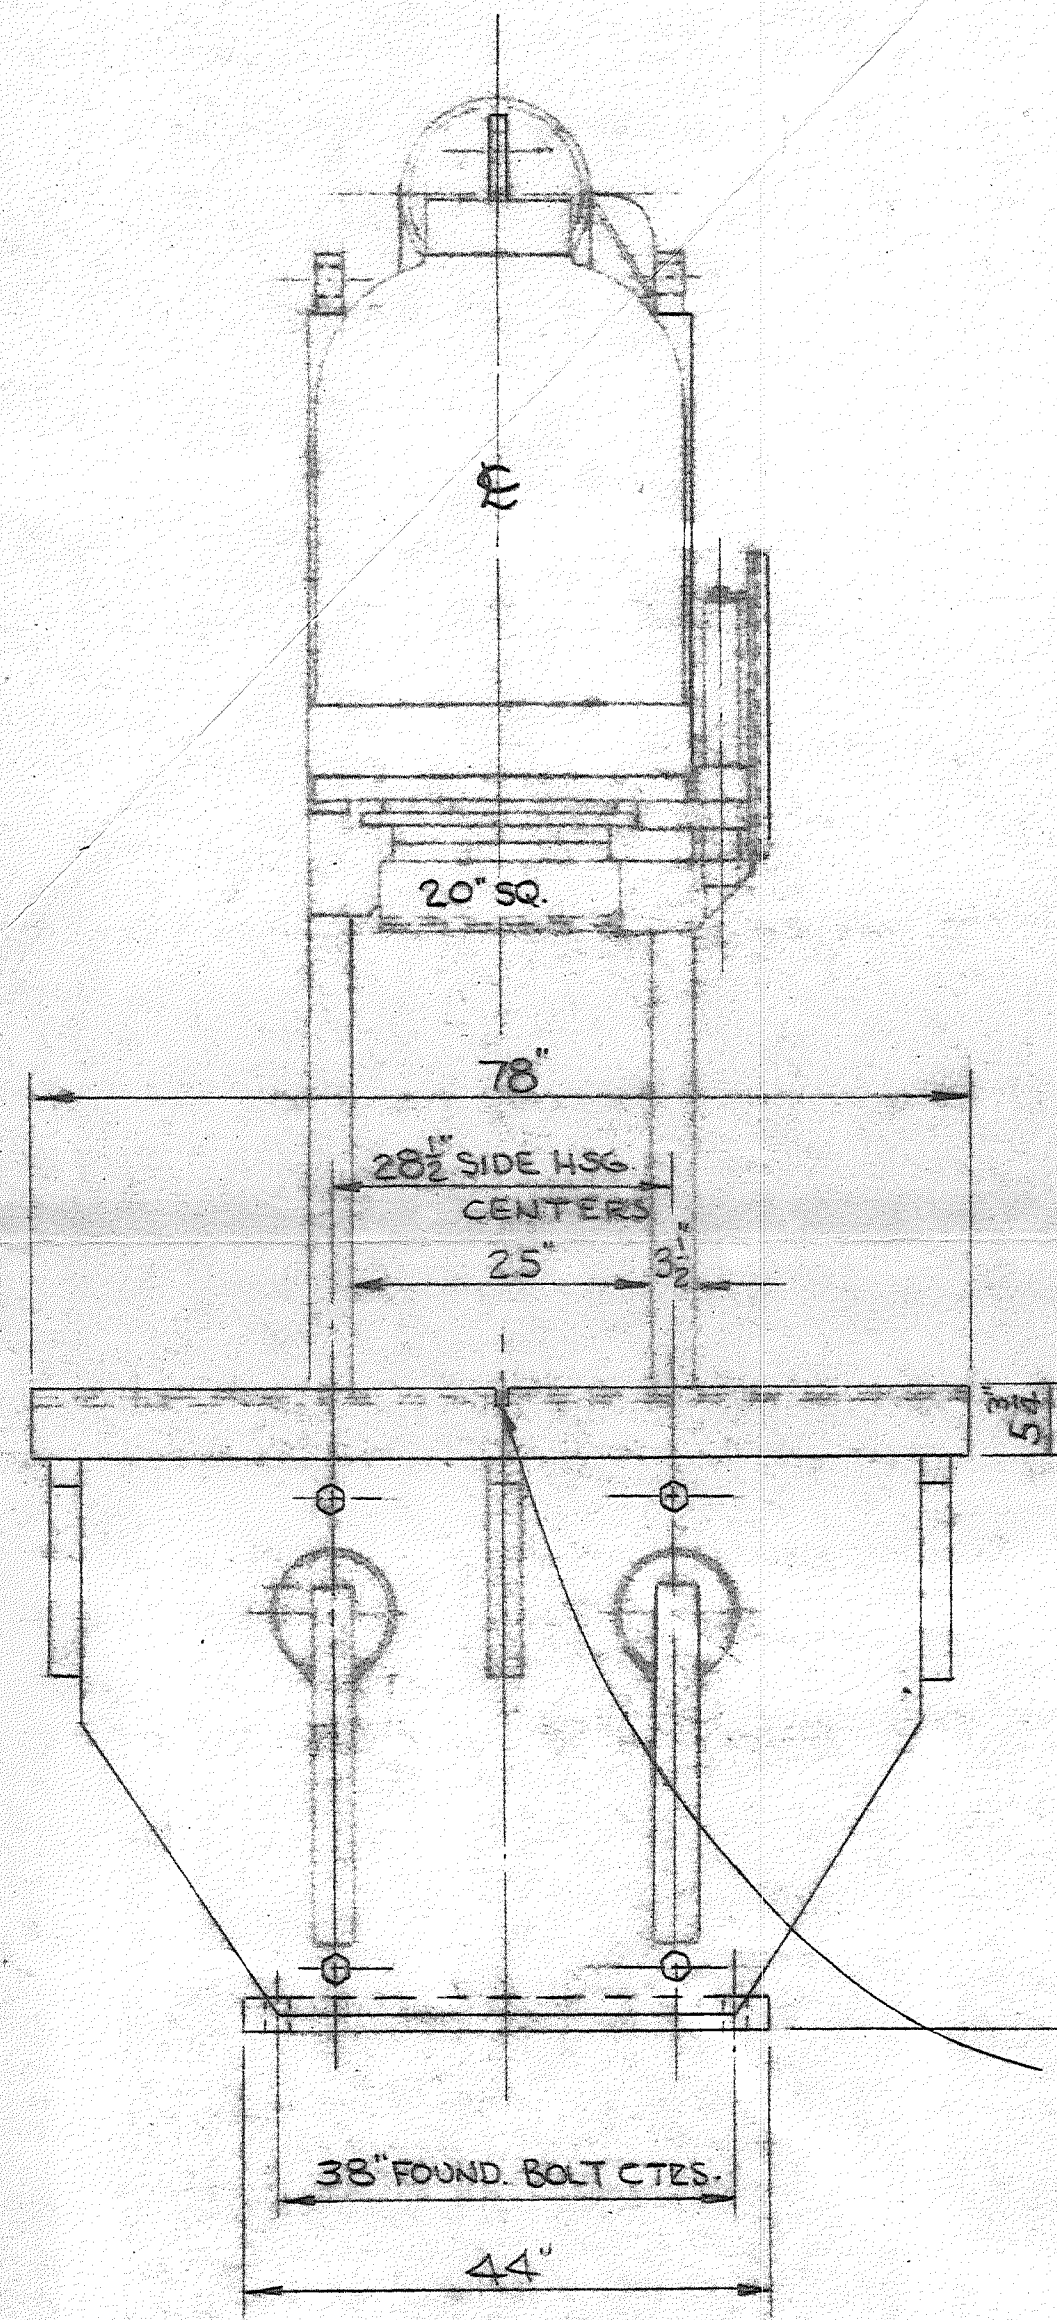

VICKERS 45V42 PUMP

"We recommend using 11.5 gallons of high quality hydraulic oil having a minimum viscosity index of 95. At 100°F the viscosity should be 175 to 230 S. U. S. Mobil DTE 26 meets this requirement"

.505" x 7/8" DEEP CENTER SLOT
FRONT TO BACK & ONE
LEFT TO RIGHT

GEN. WELDING
500PF 5466

CERTIFIED
PACIFIC PRESS & SHEAR CO.
MT. CARMEL ILL
By WJB Date 9/18/73

WEIGHT Approx 41,000 #

SYMBOL	NAME	DESCRIPTION	PACIFIC PART NO.	REV.
MICRO INCH	LAP	GRIND		
44	VERT			
OV	FINE			
16V	FINE			
20V	MEDIUM	FINE		
23V	ROUGH	SMOOTH		
25V	MEDIUM			
280V	ROUGH			

PACIFIC		PACIFIC PRESS & SHEAR COMPANY	
A DIVISION OF		MT. CARMEL, ILL.	
OAKLAND, CALIF.			
OUTLINE			
500TON PRESSFORMER (SPEC.)			
LGH	9-16-73	DWG. NO. ON FILE NO.	
WJB	3/2-1-0	27229-300	

REVISION	DESCRIPTION	DATE
1	REVISION	
2	REVISION	