

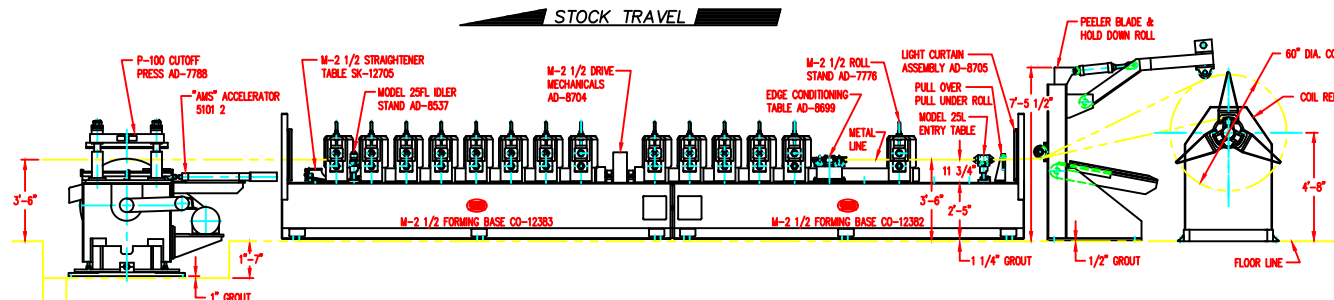


CUSTOMER POWER SUPPLY
480 V / 3 PH / 60 HERTZ



NOTE:

FENCES ENCLOSING HAZARDOUS AREAS ARE NECESSARY TO SAFEGUARD PERSONNEL.
LOCATION OF FENCES AND ACCESS GATES IS DEPENDENT ON SPECIFIC METHOD OF MATERIAL HANDLING. THEREFORE, ALL SUCH ENCLOSURES AND INTERLOCKS MUST BE PROVIDED BY THE CUSTOMER.

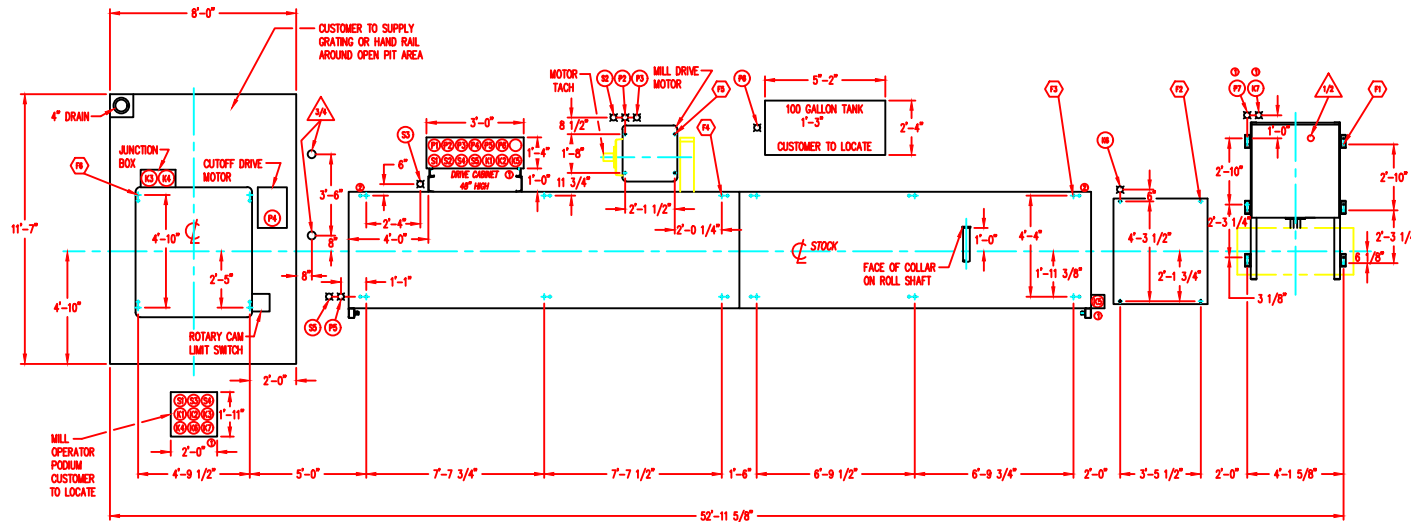

SYMBOL	QUAN.	"D" SIZE	"G" GROUT	UNIT	FUNCTION	GRIP	NOTES
F8	4	1"	1"	AD-7788	P-100 CUTOFF PRESS	1 3/4	J-BOLT
F5	4	3/4	1 1/4	407DC	MOTOR SLIDE BASE	1/4	LAG BOLT
F4	6	1"	1 1/4	CO-12383	EXIT FORMING BASE	1"	J-BOLT
F3	6	1"	1 1/4	CO-12382	ENTRY FORMING BASE	1"	J-BOLT
F2	4	1 1/4	1/2	"COIL TECH" C78991A1	PEELER BLADE & HOLD DOWN ROLL	1 1/4	J-BOLT
F1	6	3/4	-	"COE" B-7213	COIL REEL	1/2	LAG BOLT

DEVICE LEGEND

□ CONDUIT △ AIR LINE
P=POWER K=CONTROL
S=SIGNAL D=DATA

THIS IS A CAD DWG.
ALL REVISIONS
MUST ALSO BE MADE
TO THE FILE DISK

FILE No.: Y8800FD1
PLOT SCALE: 1 = 32

1	RESERVED REAR LIGHT CURTAIN & POSTS	CS	6-2-98
1	ADD CONDUIT 17, 18, & 17	CS	6-2-98

DORNER MANUFACTURING CORP.

ORDER NO.	QUANTITY
ITEM No.	
YODER	
THIS DRAWING AND ALL INFORMATION THEREIN IS THE PROPERTY OF YODER MFG. CO. IT IS CONFIDENTIAL AND NOT TO BE REPRODUCED OR COPIED. IT IS LOANED SUBJECT TO RETURN UPON DEMAND. IT IS NOT TO BE USED SUBJECT OR RELIANCE IN ANY WAY DETRIMENTAL TO THE INTEREST OF YODER MFG.	
TITLE	M-2 1/2 GENERAL ARRANGEMENT AND FOUNDATION DRAWING
No.	Y8800-100-1-D

Y8800-0110
USAGE

ANCHOR BOLT SCHEDULE