

SECTION 4

SPECIFICATIONS

DIMENSIONS


COMPONENT	MODEL Ft. (m)	LENGTH In. (cm)	WIDTH In. (cm)	HEIGHT In. (cm)	WEIGHT Lbs. (kg)
TRANSPORTER	5 X 10	86"	148"	Note 1.	Note 1.
	1.5 X 3.0	218.4 cm	375.9 cm	Note 1.	Note 1.
	6 X 12	104"	186"	Note 1.	Note 1.
	2.0 X 4.0	264.2 cm	472.4 cm	Note 1.	Note 1.
OVER/UNDER CART	5 X 10	Note 1.	Note 1.	Note 1.	Note 1.
	1.5 X 3.0	Note 1.	Note 1.	Note 1.	Note 1.
	6 X 12	Note 1.	Note 1.	Note 1.	Note 1.
	2.0 X 4.0	Note 1.	Note 1.	Note 1.	Note 1.
MAIN ELECTRICAL ENCLOSURE	5 X 10	38"	12"	48"	Note 1.
	1.5 X 3.0	96.5 cm	30.5 cm	121.9 cm	Note 1.
	6 X 12	38"	12"	48"	Note 1.
	2.0 X 4.0	96.5 cm	30.5 cm	121.9 cm	Note 1.
OVER/UNDER CART ELECTRICAL ENCLOSURE	5 X 10	20"	8"	20"	Note 1.
	1.5 X 3.0	50.8 cm	20.3 cm	50.8 cm	Note 1.
	6 X 12	20"	8"	20"	Note 1.
	2.0 X 4.0	50.8 cm	20.3 cm	50.8 cm	Note 1.

- (1) UNLISTED DIMENSIONS AND WEIGHT ARE SPECIFIED ON CERTIFIED FOUNDATION DRAWING.
- (2) COMPONENT WEIGHTS DO NOT INCLUDE WORKPIECE MATERIAL.
- (3) DIMENSIONS SHOWN ARE FOR GENERAL LAYOUT PURPOSES ONLY. SEE CERTIFIED FOUNDATION DRAWING FOR ACTUAL DIMENSIONS.

SPECIFICATIONS

MATERIAL SPECIFICATION	MODEL 5 X 10 (1.5 X 3.0 m)		MODEL 6 X 12 (2.0 X 4.0 m)	
	Minimum	Maximum	Minimum	Maximum
Width	30.0"	60.0"	36.0"	78.75"
	762 mm	1524 mm	914.4 mm	2000.25 mm
Length	40.0"	120.0"	50.0"	157.5"
	1829 mm	3098 mm	2400 mm	4051 mm
Thickness per piece	0.036"	0.500"	0.036"	0.500"
	0.9 mm	12.7 mm	0.9 mm	12.7 mm
Stack Height on an Over/Under Cart (including pallet height)	0	9.00"	0	9.00"
	0	228.6 mm	0	228.6 mm
Weight per piece	0	1050 lbs.	0	1850 lbs.
	0	480 kg	0	840 kg
Net Weight on an Over/Under Stack Cart	0	12000 lbs.	0	12000 lbs.
	0	5443 kg	0	5443 kg

Note: Material density determines if Maximum Stack Height or Maximum Weight is more restrictive. Stored material must not exceed either specification.

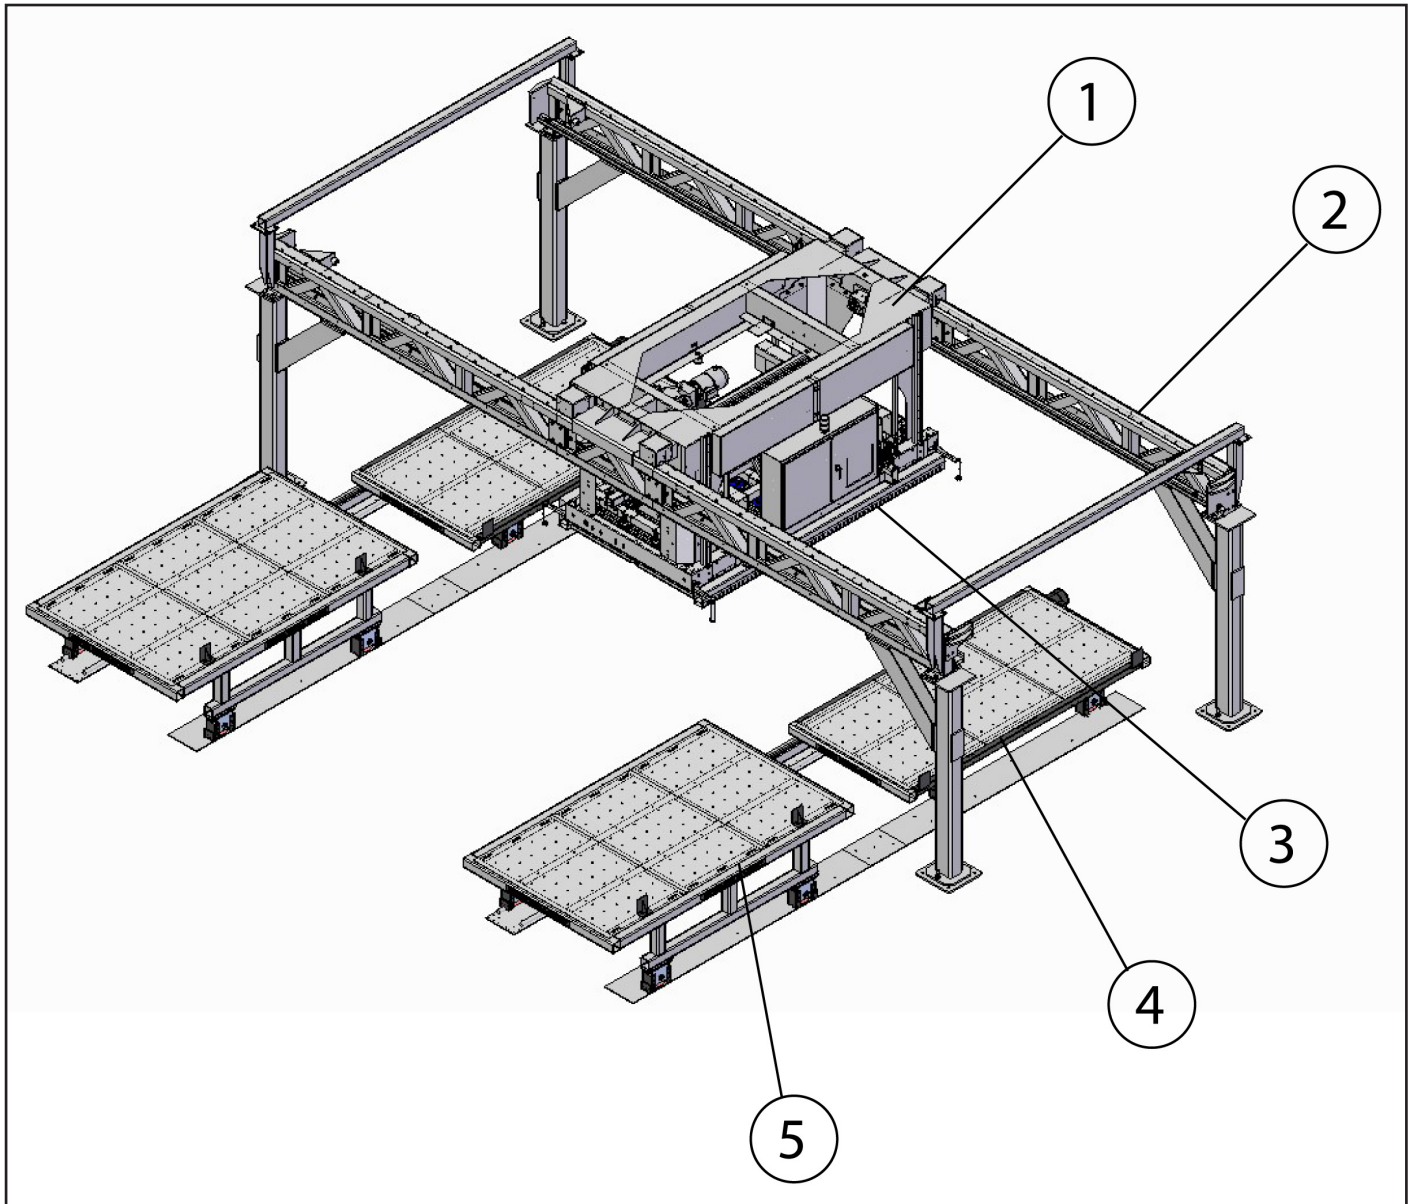

- 1. Transporter
- 2. Super Structure
- 3. Z Frame

- 4. Under Cart (Optional)
- 5. Over Cart (Optional)

Figure 1-1 MMHS Overview