



TABLE BENDERS

11M RADIUS BENDER




The Heavy-duty 11M Radius Bender will radius up to #11 (40mm) rebar. The machine will form a radius without pre-bending the bar. Long machine life and operator safety are always paramount with KRB. The large table top keeps operator's hands away from pinch points. Integrated rollers in the table top assist the feeding of the bar. The safety guard can be raised with the press of a

button using the positionable switch. E-Stops can be easily positioned to wherever the operator is working. Bumper guards at the tables edge and additional e-stops at the front of the machine are all designed for the safest operation.





KRB
1058 Cool Creek Road
Wrightsville, PA 17368
Phone: 717-252-3667
Fax: 717-252-9247
info@krbmachinery.com

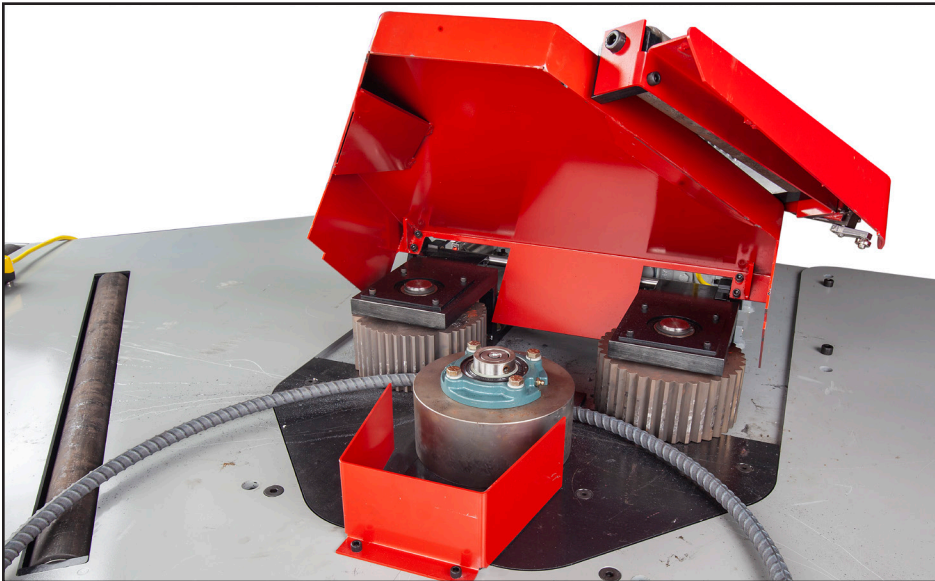

The safety guard can be raised with the press of a button using the positionable switch.

The KRB 11M Radius Bender is designed to radius rebar without the need to pre-bend the end of the bar. Keeping the operator's hands away from the forming rolls allows safe operation.

The KRB 11M Radius Bender has been designed with a guard for making larger rings in a safer operation.

KRB Radius Control 2000 features multi radius memory locations for 32 radii for each bar size as well as a (6) Multi-Radius memory locations right from the main screen to speed set-up.

For each bar size, enter the desired radius in actual feet and inches or metric. The KRB 11M Radius Bender comes standard with a VFD motor and integrated rollers in the table top.

SPECIFICATIONS

CAPACITY	#11 (40mm) bar; grade 60 or 65kg/mm ²
ELECTRIC	<p>Feed motor 7.5 hp (7.3kW) variable speed controlled by a VFD. 380/480 VAC 3-Phase 50/60Hz standard Other voltages available upon request.</p> <p>All electrical controls are U.L. (Underwriters Laboratories) and c.U.L. Listed.</p> <p>All wiring meets N.E.C. (National Electrical Code) Standards.</p> <p>All electrical enclosures meet NEMA 4/12 rating. (Watertight, dust tight, oil tight).</p> <p>Multi Radius (6) presets from main screen, 32 memory positions per bar size.</p>
VARIABLE FEED RATE	144 feet/minute to 36 feet/minute (44 meters/minute or 11 meters/minute)
WEIGHT	4000 lbs. (907kg)

