



MARCUS

Marcus Transformer LTD
Phone: 1-800-267-7376
Fax: 1-866-205-7526
Email: Info@marcustransformer.com

TECHNICAL DATA MODEL: MT 30H3

3-PHASE ISOLATING

DESCRIPTION

Type	DRY TYPE DISTRIBUTION (ANN)
KVA	30
Primary (Volts)	208
Secondary (Volts)	240
Phase	3
Enclosure	NEMA 1
Impedance (%Z)	5.1
Insulation Class	220°C
Temperature Rise	150°C
Frequency	60Hz
Weight (LBS/KG)	250 / 140
Connection	Dd1(TT-1)
BIL.	10KV

Primary connectors per phase :

Secondary connectors per phase:


PERFORMANCE

No load loss	106W
Total loss	1664W
Noise level	45dB

EFFICIENCY

			Efficiency = 97.56%
			(As per CSA C802.2 & NEMA TP-1)

PHYSICAL DIMENSIONS

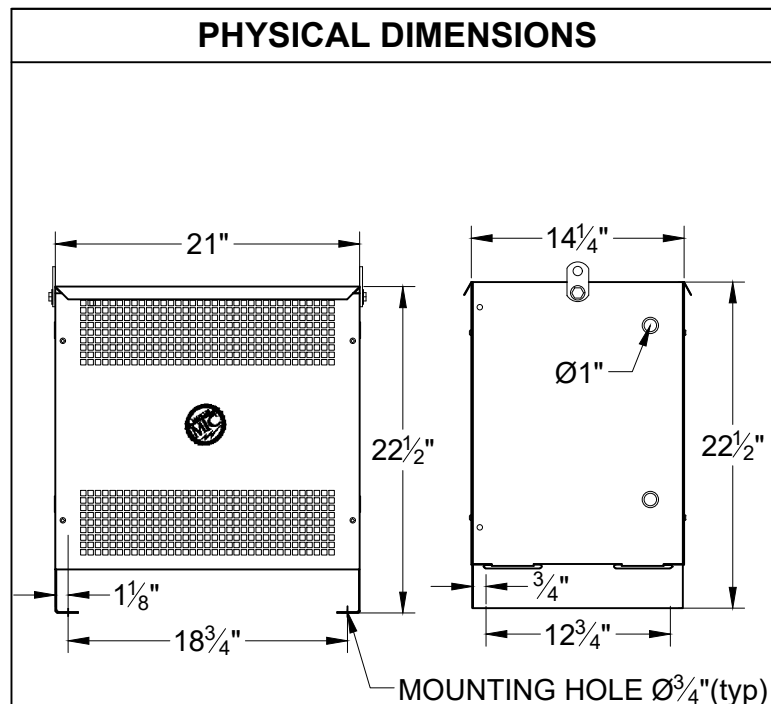

FRONT VIEW

SIDE VIEW

MOUNTING: WALL / FLOOR

FEATURES:

- Anti-vibration pads installed between the core/coil and the enclosure
- Ground lug provided
- Leads brought-up and solidly positioned into separate terminal boards
- CSA enclosure: ventilated painted ASA 61gray
- Transformer meets the efficiency values as per CSA C802.2 / NEMA TP-1
- Copper ground strap between core/coil and enclosure
- CSA certified / UL listed
- Copper windings

Customer / PO		COMMENTS
Project		
Engineer		
Contractor		
Revision Date		