


WMT•60/WMT•84

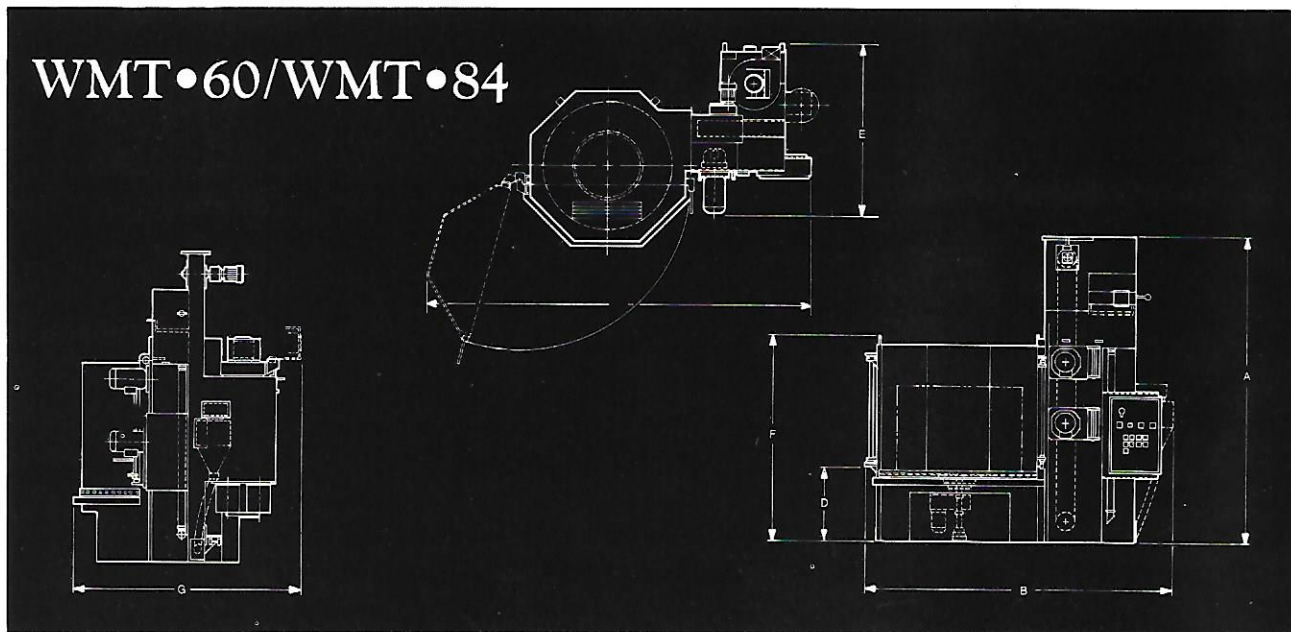

EQUIPMENT SPECIFICATIONS FOR MODELS WMT•60 and WMT•84

MODEL	WMT•60	WMT•84
Operating Dimensions:		
Height (A)	12' 0"	12' 10"
Length (B)	13' 0"	14' 2 1/4"
Width (C) Open Door	20' 6"	22' 7 3/4"
Loading Height (D)	2' 9"	3' 7"
Actual Dimensions:		
Width (E)	6' 4"	6' 4"
Cabinet Height (F)	8' 1"	8' 11"
Width (G) Open D/C Door	9' 6 1/2"	10' 6 1/2"
Table Diameter	5' 0"	7' 0"
Max. Work Height (Cleaning)	3' 4"	3' 4"
Max. Work Height (FIT)	4' 4"	4' 4"
Max. Work Diameter	4' 11"	6' 11"
Max. Load Weight	4,500 lbs.	6,000 lbs.
Loading Door	Manual Swing Door with Safety Interlock	Manual Swing Door with Safety Interlock
Electrical Requirements:		
Wheel Motor	(2) 10 h.p. - 3600 RPM	(2) 10 h.p. - 3600 RPM
Table Drive Gearmotor	1/2 h.p. - 5 RPM	1 h.p. - 4 RPM
Elevator Drive Gearmotor	1 1/2 h.p. - 70 RPM	1 1/2 h.p. - 70 RPM
Dust Collector Motor	5 h.p. - 3600 RPM	5 h.p. - 3600 RPM
Standard 460 volts, 3 phase, 60 hertz; Optional 230 volts, 3 phase, 60 hertz or 208 volts, 3 phase, 60 hertz		
Ventilation	1500 CFM Integral D/C with Blast Cabinet	1500 CFM Integral D/C with Blast Cabinet
Noise Level	90 dBA or less	90 dBA or less
Abrasive Charge	2,200 lbs.	2,200 lbs.
Gross Shipping Weight	8,150 lbs.	11,300 lbs.

In a Foundry application, castings must be shaken out and free of cores.

Due to continuing product improvement, specifications are subject to change without notice.

THE WHEELABRATOR CORPORATION
1606 Executive Drive, LaGrange, Georgia 30240
800/544-4144

© 1989 The Wheelabrator Corporation
CC/3-91 Printed in U.S.A.

The Wheelabrator pride is derived from the attention we devote to details while satisfying your requirements.

Distributed by: