



SYM.	REVISION NOTES	DATE	BY
~	-	-	-

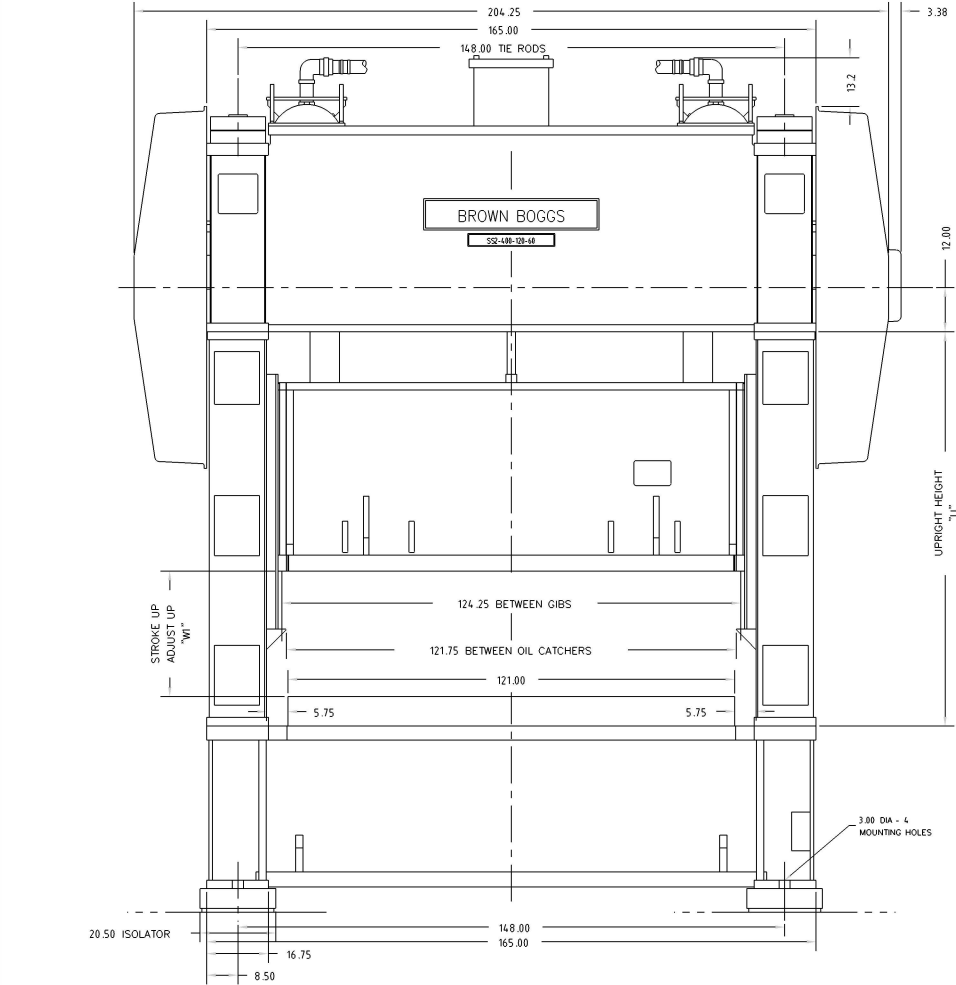

ITEM	STROKE	SHUT HEIGHT	STROKE UP ADJUST. UP "W1"	WINDOW OPENING "W2"	OVERALL HEIGHT "H"	HT. OVER CYLINDERS "H2" *	HT. OVER CYLINDERS "H2" **	UPRIGHT HEIGHT "U"	TIE-ROD LENGTH "L"
1	12	22	34	29.25	211.75	216.50	218.50	106.75	197.50
2	12	32	44	39.25	221.75	226.50	228.50	116.75	207.50
3	14	28	42	36.25	218.75	235.50	237.50	113.75	204.50
4	12	31	43	38.25	220.75	225.50	227.50	115.75	206.50

* FOR 10" ADJUSTMENT
 ** FOR 12" ADJUSTMENT

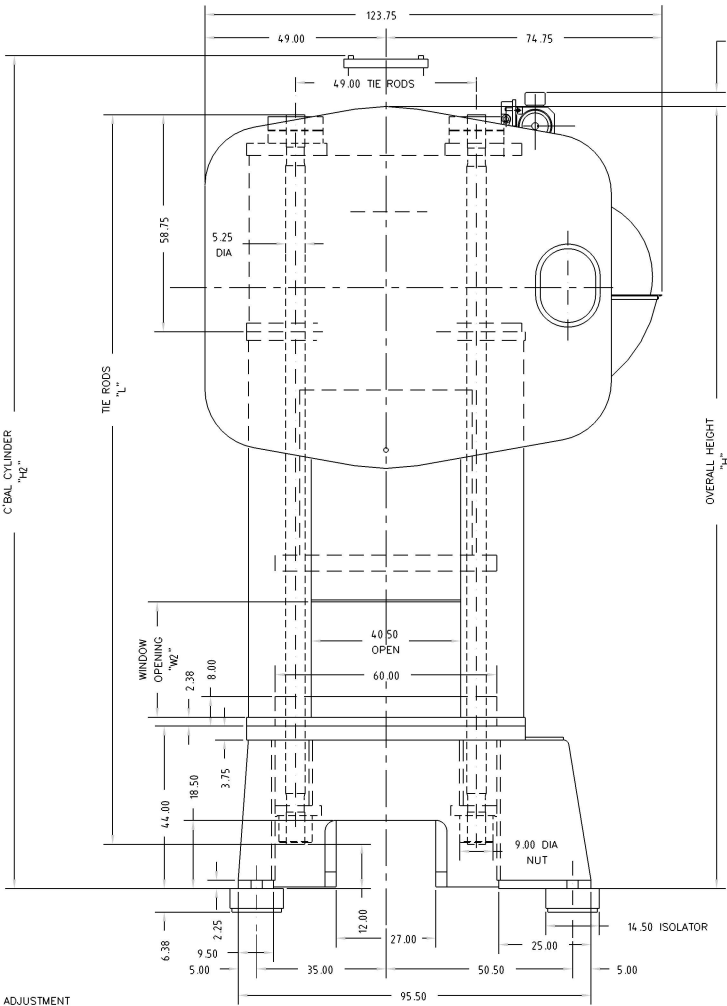

GEAR GUARD TO TOP OF MOTOR DRIVE "M"

ITEM	MOTOR HP	DIMENSION "M"
1	40	3.81
2	50	-
3	60	5.63
4	75	8.63
5	100	7.75

PRESS SPECIFICATIONS:

TONNAGE	400 TONS
RATED POINT	1/2" A.B.D.C
BED AREA (L-R)	120 IN.
BED AREA (F-B)	60 IN.
WINDOW OPENING	40 IN.
DRIVE TYPE	SBG TED
ADJUSTMENT	
SPEED	
MOTOR DRIVE	

DIMENSIONS IN INCHES:	
TOLERANCES UNLESS STATED:	
FRACT.	±1/64
DEC. XX	±.01
DEC. XXX	±.004
ANGLES	±5°

B		BROWN BOGGS	
FOUNDRY & MACHINE CO. LTD.			
MACH.No. SS2-400-120-60 PRESS			
DRAWN: KS		PART NAME GENERAL ARRANGEMENT	
CHECKED:		PART No.	
DATE: FEB. 09, 01		C58087	
SCALE: 1 : 36		PAGE 1 OF 1	
		REV.	

