

It's a Lantech!

Our most popular stretch wrapper

- Maximum versatility. Wraps large, tall, heavy or fragile loads including doors, windows and more!
- Choose from hundreds of options to customize your machine to meet your specific requirements.
- The utmost in safety. No pinch points or trip hazards. All motors and wires are completely enclosed.
- Intuitive controls require little or no training.
- Lean manufacturing process builds in quality and reliability.
- Years of trouble-free and worry-free operation.
- No scheduled preventative maintenance.



Q-300
*Shown with Pallet Grip option.

Q-300

Boost your machine's performance with these patented features:

Pallet Grip®

Don't Take More Risk Than You Have To!

Millions of loads slide off their pallets during shipment each year, causing billions of dollars of rework and waste.



Pallet Grip rolls up a film cable and drives it down onto the pallet, locking the load. This makes sure your load does not slide off during transit.

EZ Weigh™ Integrated Scale

Check Every Load for Quality and Freight Cost!

Weigh and wrap in one easy step.

Built-in weigh system fully integrated into turntable.



Same footprint as standard Q semi-automatic.

Increase productivity even more. Upgrade to a Q-300XT stretch wrapper.

Work Smarter . . . Keep your driver on the fork truck!

Patented XT Cut and Clamp® automatically captures the stretch film and cuts it at the end of the wrap cycle.

Save two minutes of fork truck driver labor per load.

Q-300 Specifications

PERFORMANCE CRITERIA

■ Production Speed	25-35 loads per hour
■ Maximum Load Diagonal	72" Recommended
■ Maximum Load Height	80"
■ Maximum Load Weight	4000 lbs.

LOAD HANDLING SYSTEM

■ Turntable, Smooth Top	65" Diameter
■ Turntable Drive	3/4 HP TEFC Motor
■ Turntable Speed	1-12 RPM

FILM DELIVERY SYSTEM

■ Power-Roller Stretch System	200% Standard (100%-300% available)
■ Wrap Force	Variable Control
■ Film Capacity	10" Roll Diameter, 20" Film Web Width

MACHINE SHIPPING WEIGHT

■ Machine Size	120"L x 68"W x 98"H
■ Shipping Weight (including skid - approximate)	1650 lbs. (excludes ramp)


ELECTRICAL REQUIREMENTS

■ Machine Voltage	120V, 20 Amp
■ Microcontroller	Standard
■ Wrap Cycle Pause	Standard
■ One Way Wrap	Standard

SERVICE SUPPORT PHONE NUMBER

24 hrs/7 days a week
800-866-0322

Specifications subject to change without notice. Lantech systems and sub-systems are protected by U.S. and foreign patents. Additional U.S. and foreign patents pending. © Lantech

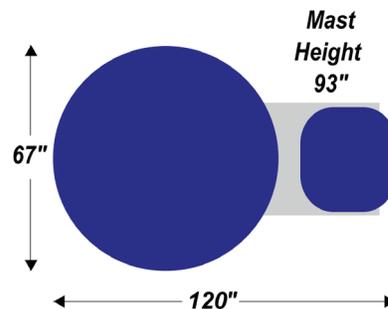

Q-300XT shown with Click-n-Go Remote Control

