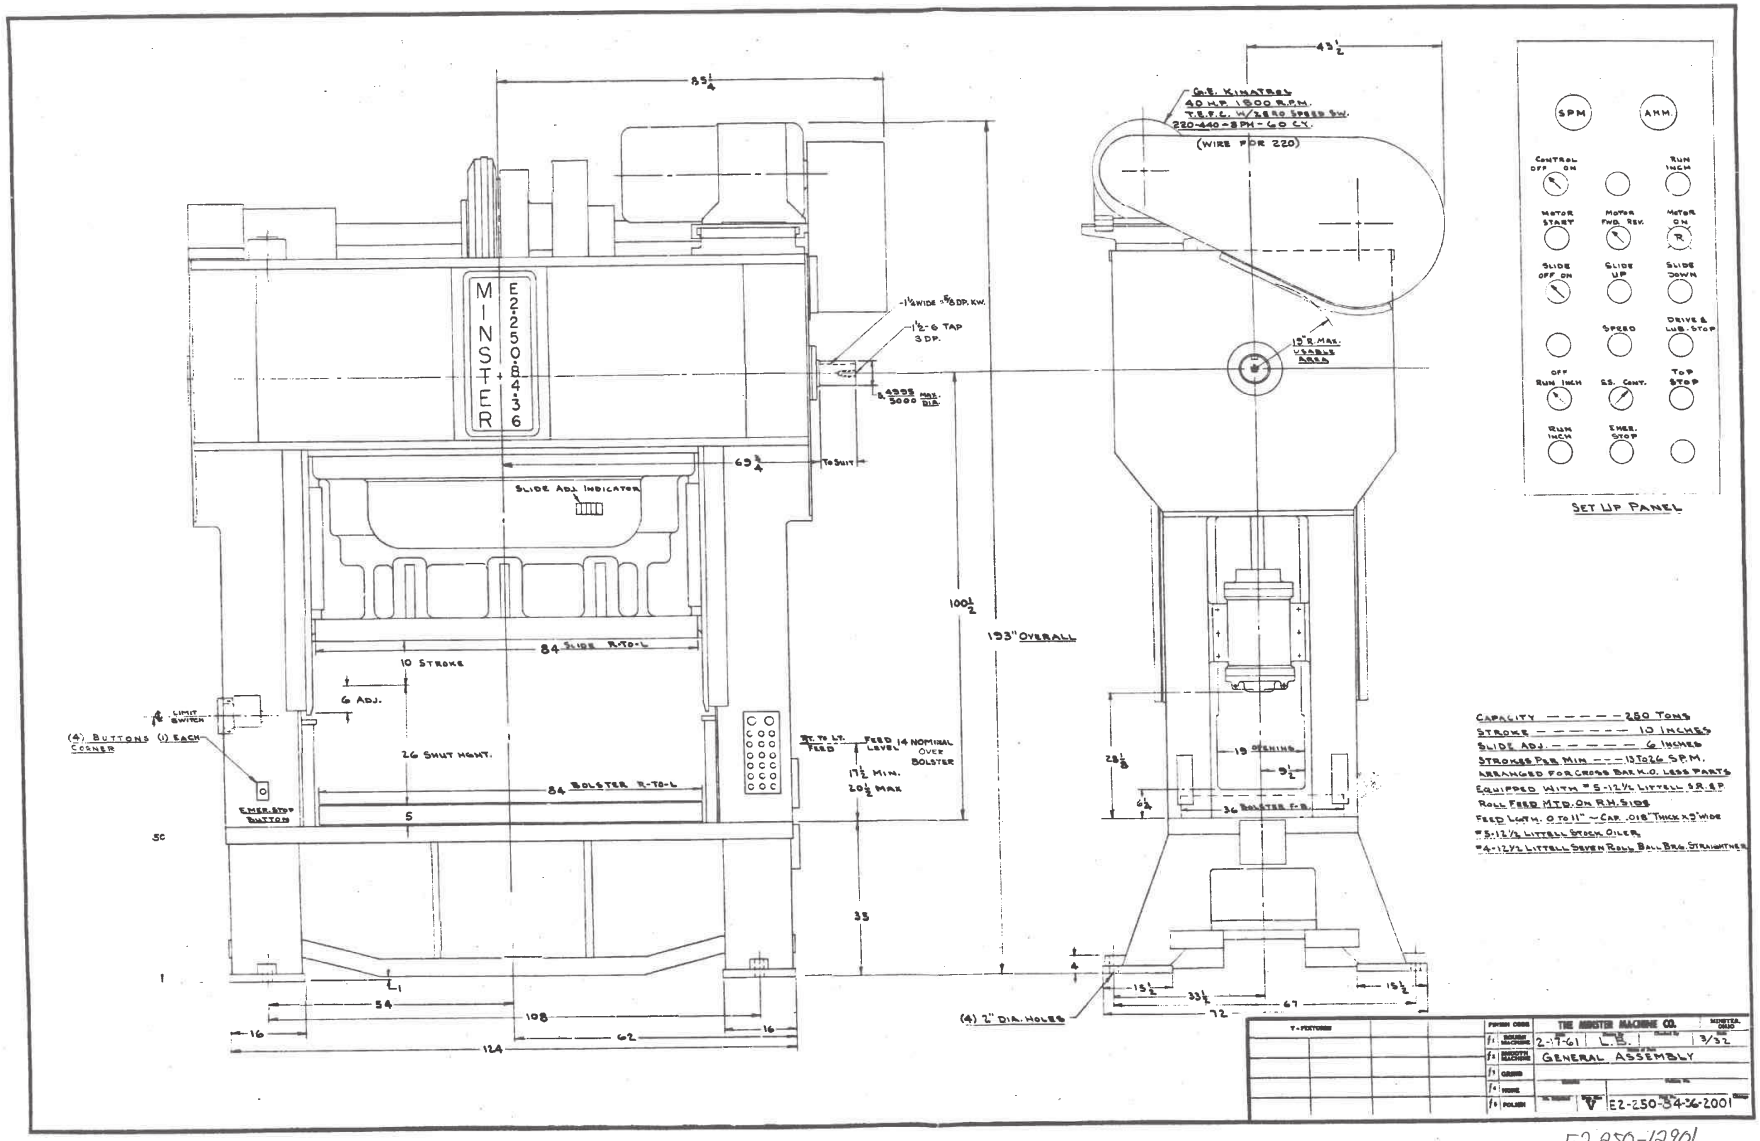
85 1/4
MINSTER
E2-250-84-36
-1 1/4 WIDE - 5/8 DP. KW.
1 1/2-6 TAP 3 DP.
2.4995 / 2.5000 DIA.
69 3/4
TO SUIT
SLIDE ADJ. INDICATOR
100 1/2
193" OVERALL
84 SLIDE R-TO-L
10 STROKE
6 ADJ.
LIMIT SWITCH
(4) BUTTONS (1) EACH CORNER
26 SHUT HGHT.
84 BOLSTER R-TO-L
EMER. STOP BUTTON
5
SC
RT. TO LT. FEED
FEED LEVEL 14 NOMINAL OVER BOLSTER
17 1/2 MIN.
20 1/2 MAX
35
4
54
108
16
62
16
124
43 1/2
G.E. KINATRED
40 H.P. 1800 R.P.M.
T.E.F.C. W/2 SPD SW.
220-440-3PH-60 CY.
(WIRE FOR 220)
12" R. MAX. VARIES ARCS
28 1/8
19 OPENING
9 1/2
6 1/4
36 BOLSTER F-B.
(4) 2" DIA. HOLES
15 1/2
33 1/2
67
72
15 1/2
SPM
AHM
CONTROL OFF ON
RUN INCH
MOTOR START
MOTOR FWD. REV.
MOTOR ON
SLIDE OFF ON
SLIDE UP
SLIDE DOWN
SPEED
DRIVE & LUB. STOP
OFF RUN INCH
SS. CONT.
TOP STOP
RUN INCH
EMER. STOP
SET UP PANEL
CAPACITY - - - - - 250 TONS
STROKE - - - - - - - 10 INCHES
SLIDE ADJ. - - - - - 6 INCHES
STROKES PER MIN - - - 13 TO 26 S.P.M.
ARRANGED FOR CROSS BAR H.O. LESS PARTS
EQUIPPED WITH #5-12 1/2 LITTELL S.R.&P.
ROLL FEED MTD. ON R.H. SIDE
FEED LGTH. 0 TO 11" ~ CAP. .018 THICK x 2" WIDE
#5-12 1/2 LITTELL STOCK OILER
#4-12 1/2 LITTELL SEVEN ROLL BALL BRG. STRAIGHTNER
THE MINSTER MACHINE CO.
MINSTER, OHIO
2-17-61
L.B.
3/32
GENERAL ASSEMBLY
E2-250-84-36-2001

E2-250-12901