
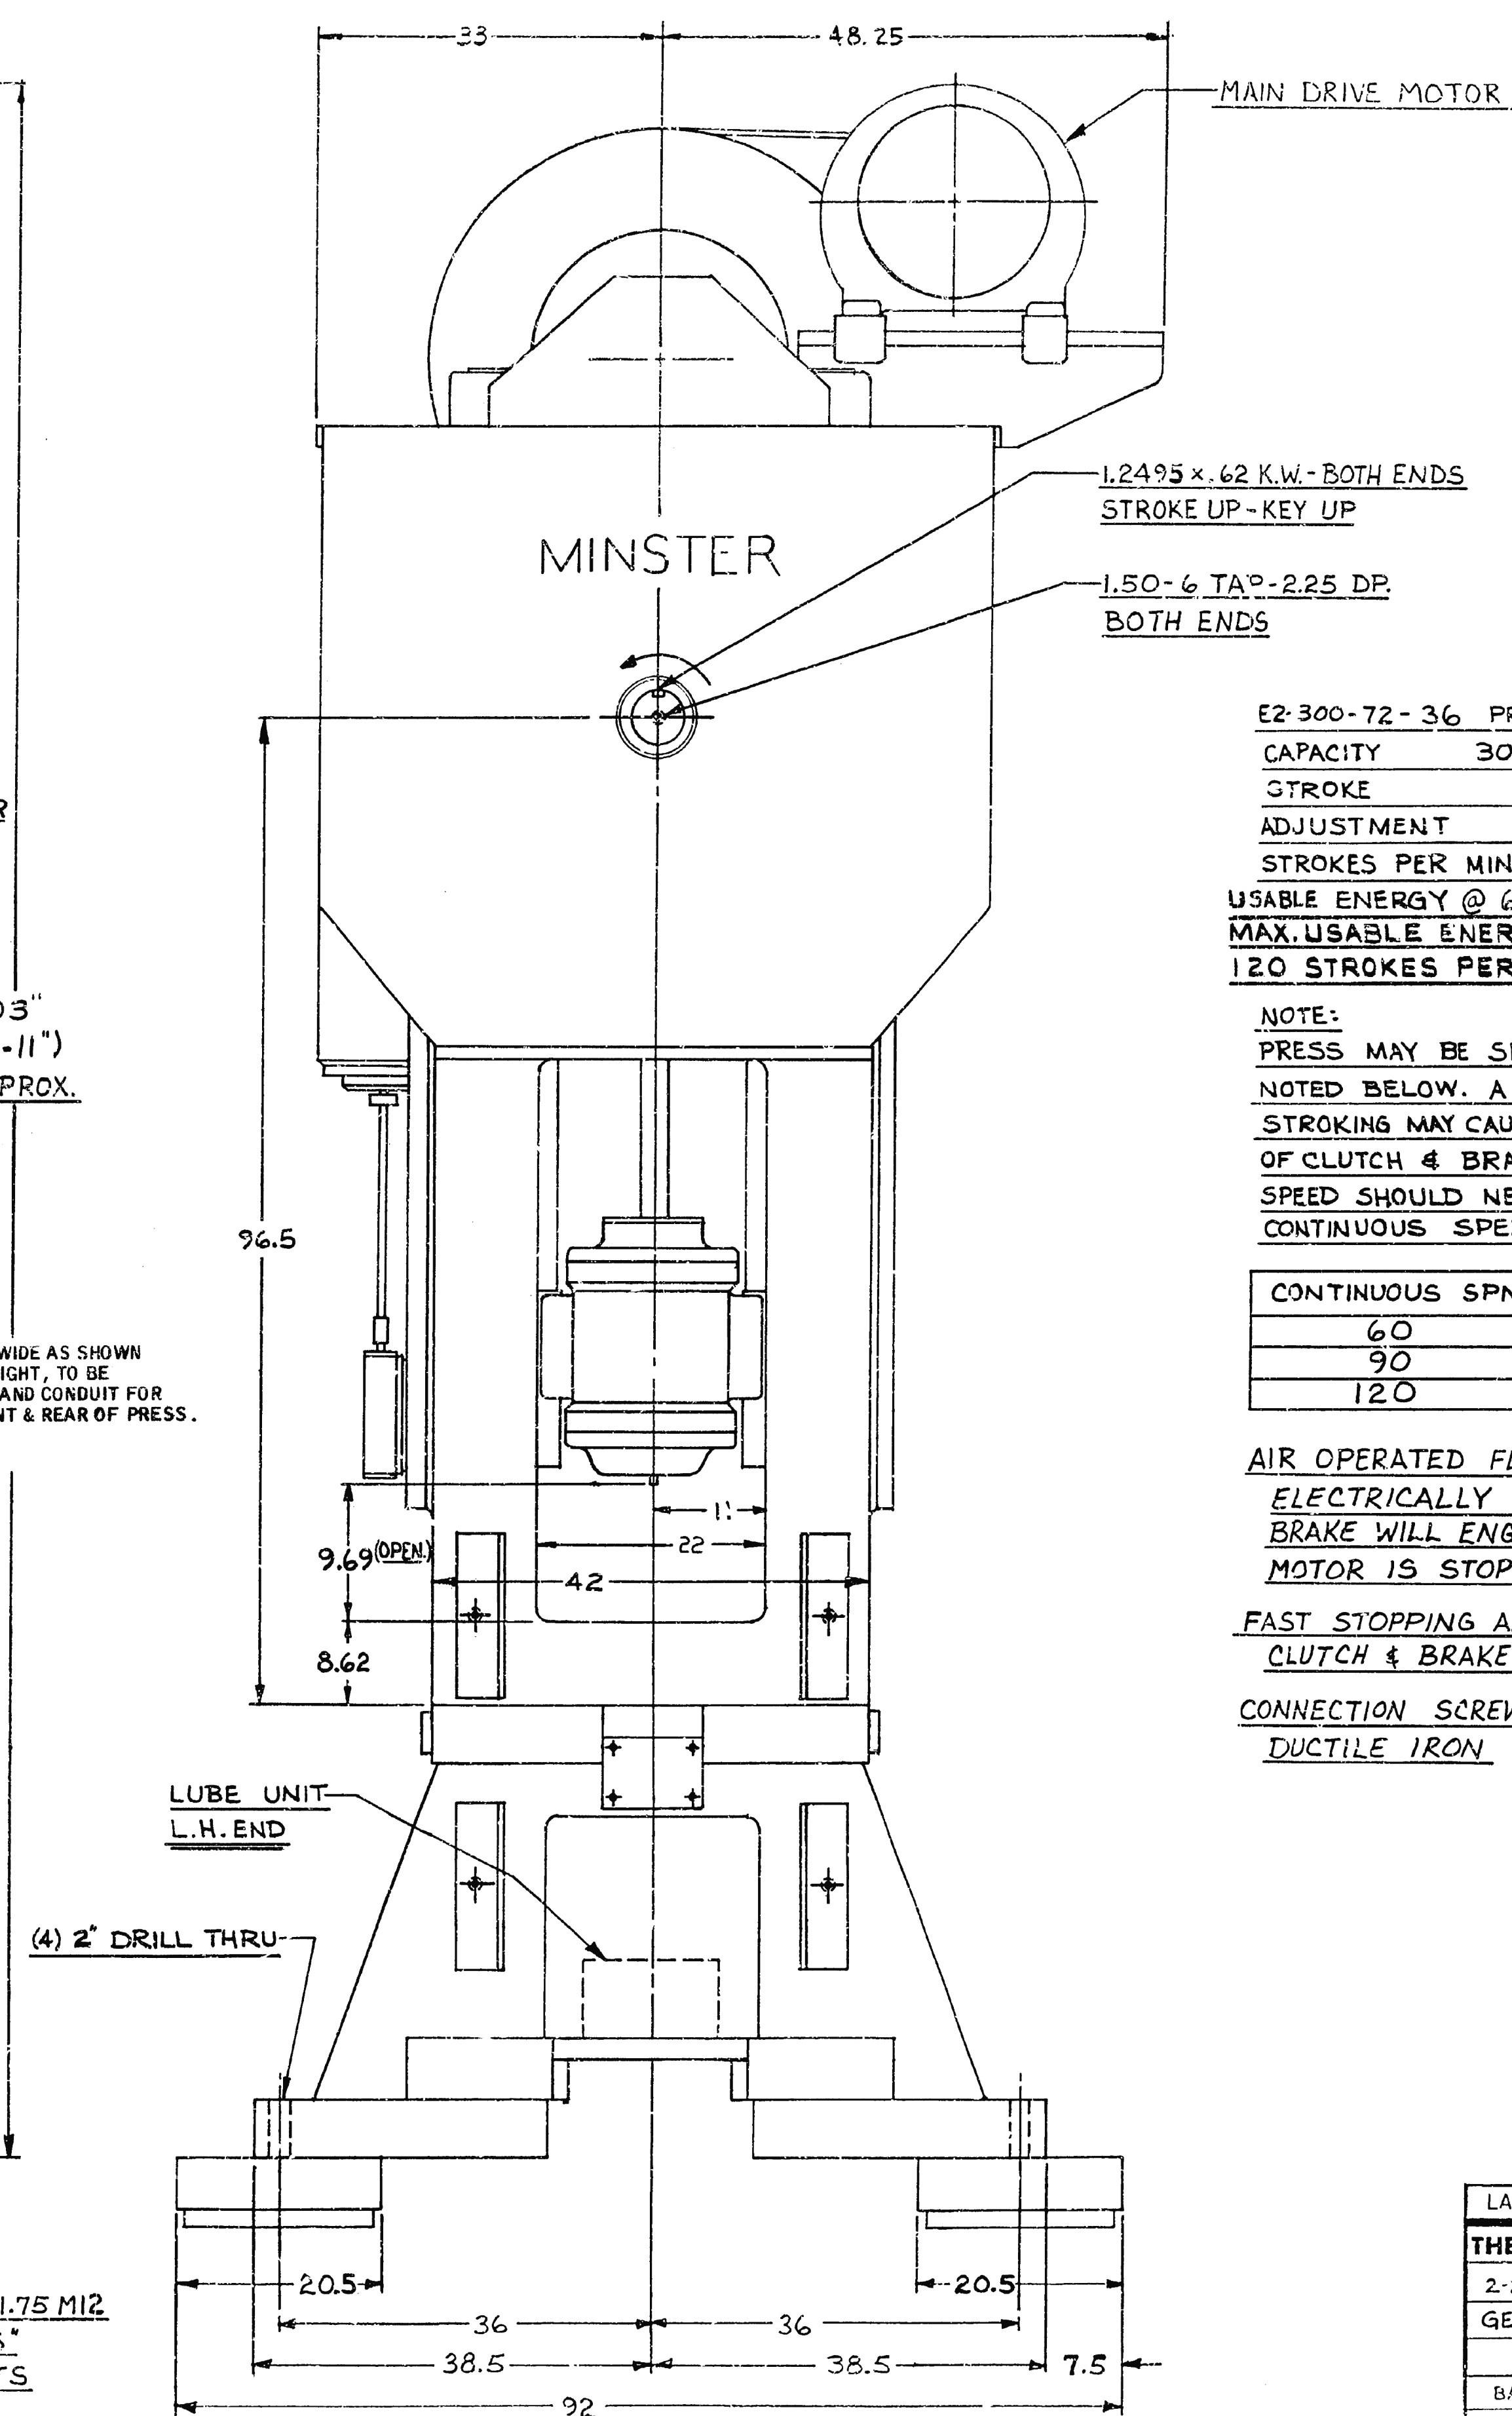


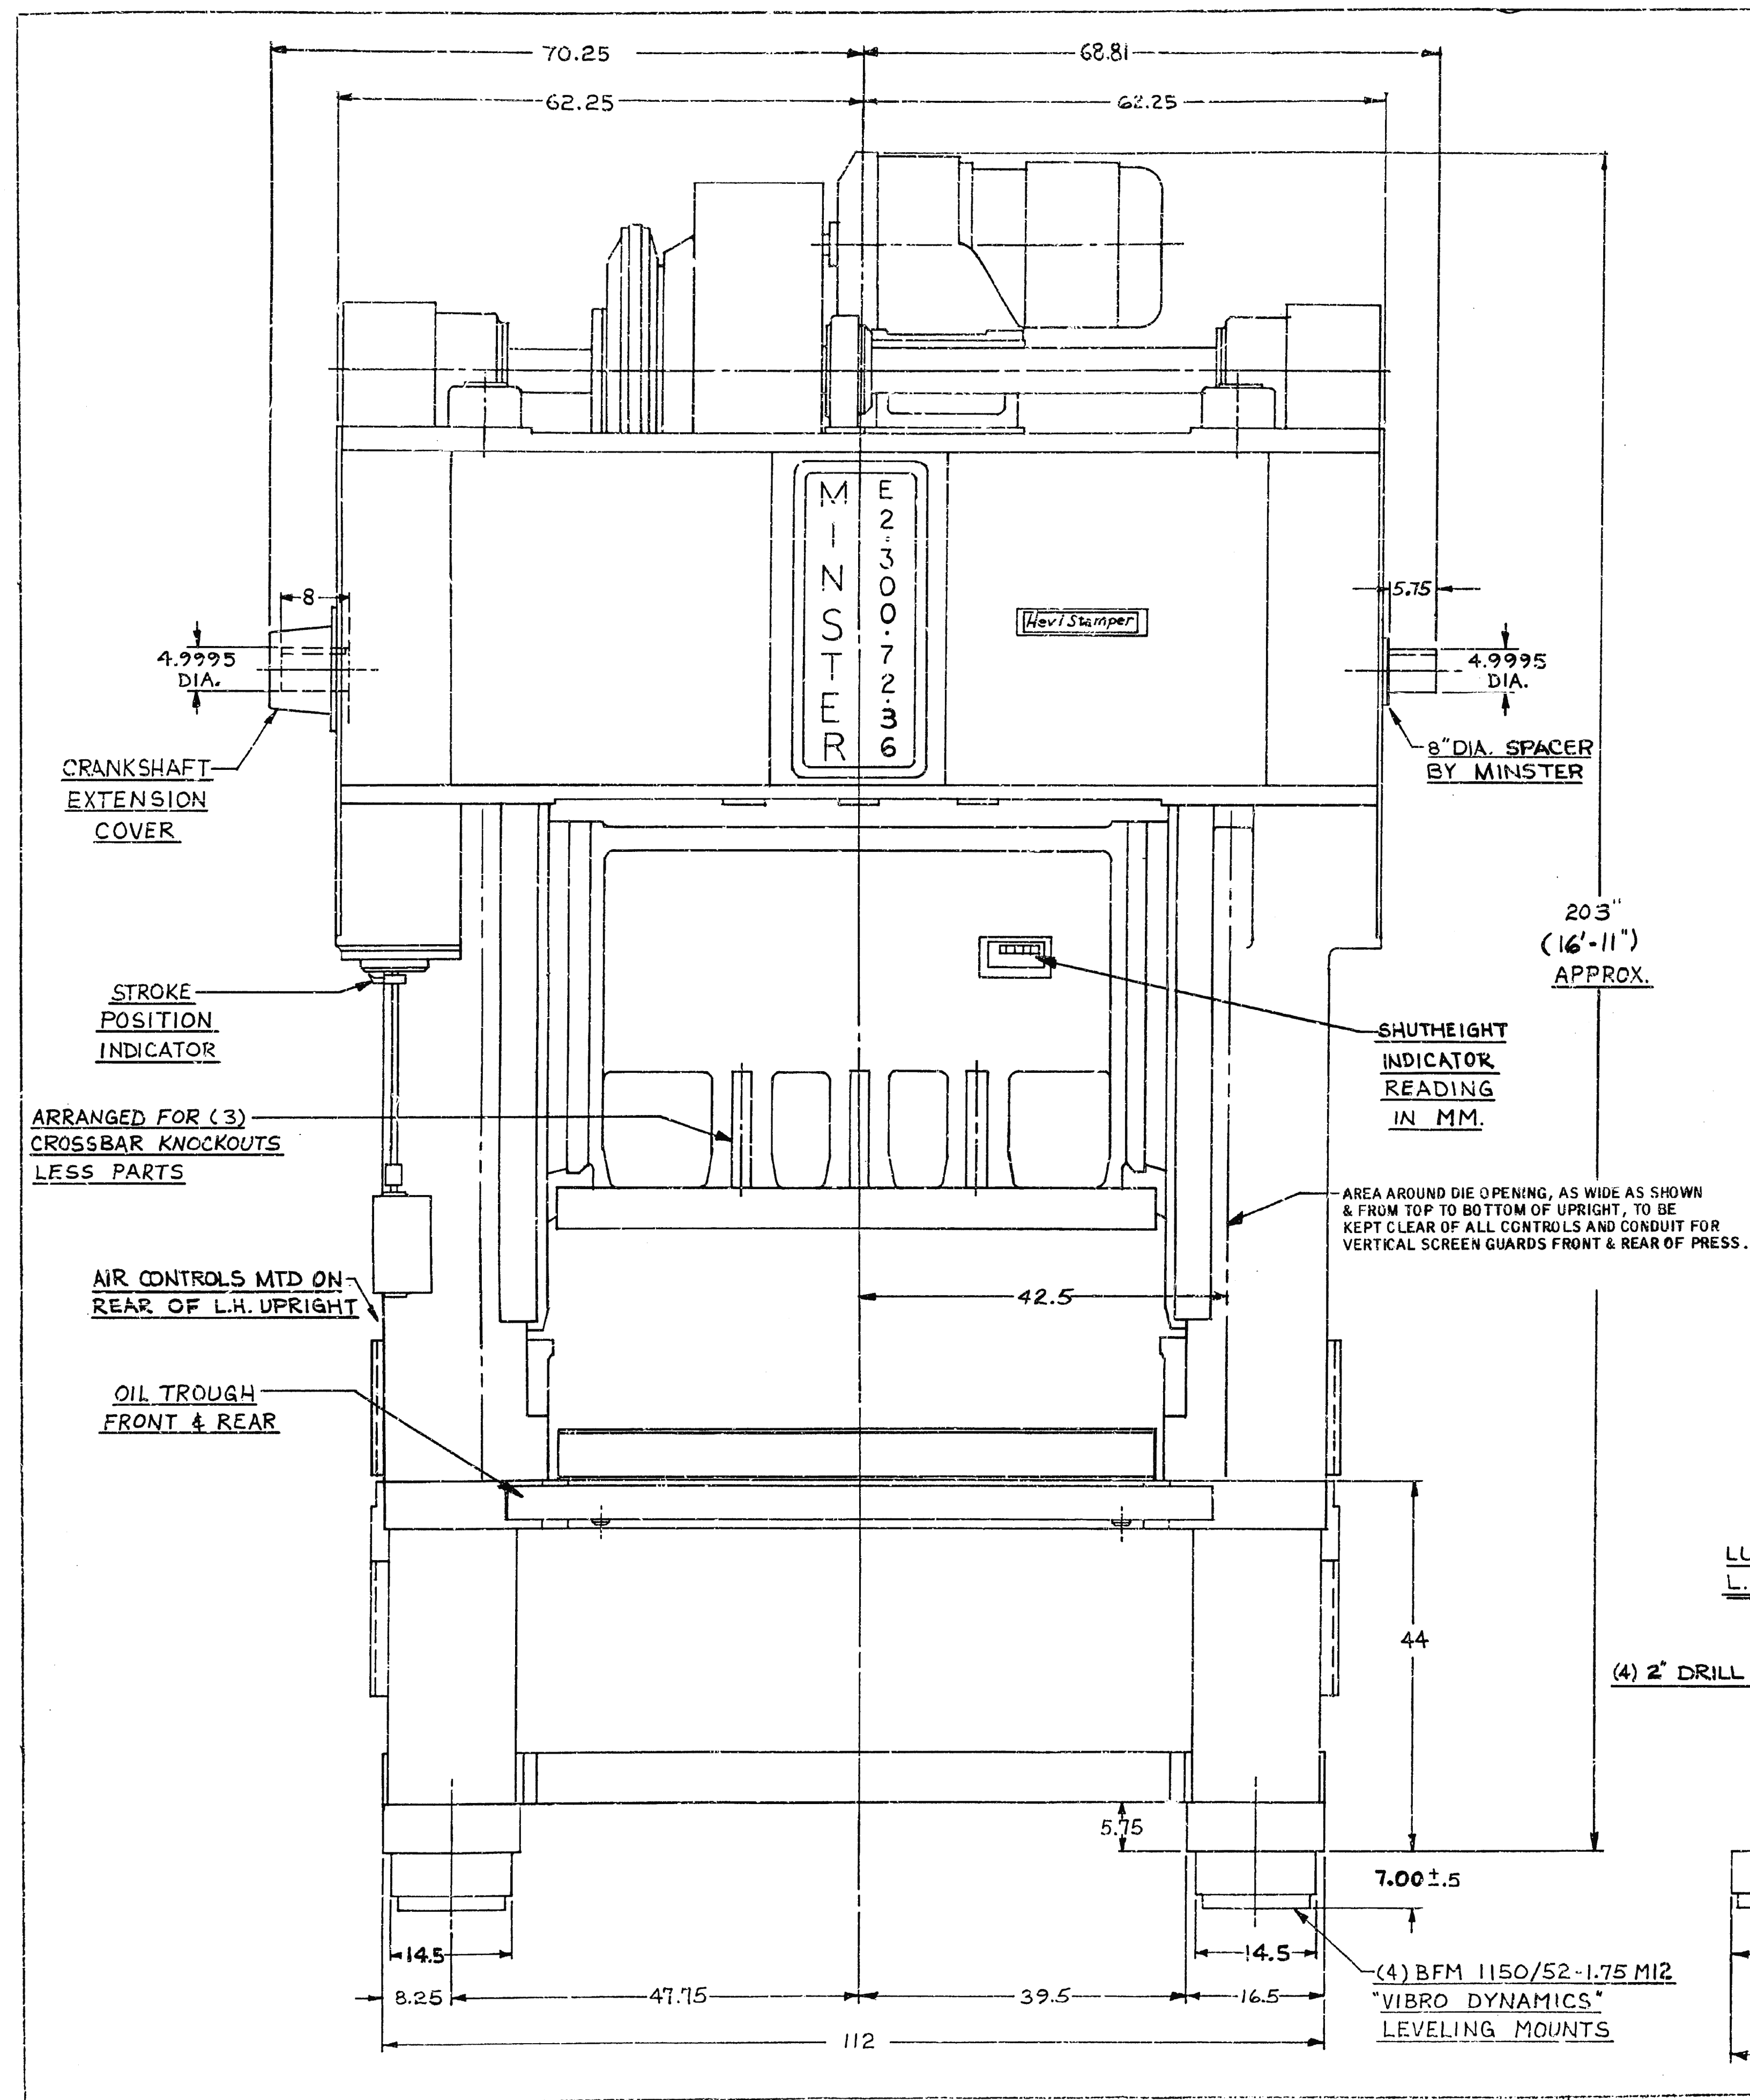

E2-300-72-36 PRESS
CAPACITY 300 TONS
STROKE 4 IN.
ADJUSTMENT 6 IN.
STROKES PER MIN. 0-120
USABLE ENERGY @ 60 S.P.M. = 64 INCH TONS
MAX. USABLE ENERGY FROM 69 TO 120 STROKES PER MIN. = 86 INCH TONS

NOTE:
PRESS MAY BE SINGLE STROKED AS NOTED BELOW. A HIGHER RATE OF SGL. STROKING MAY CAUSE EXCESSIVE MAINTENANCE OF CLUTCH & BRAKE. THE SINGLE STROKING SPEED SHOULD NEVER EXCEED 75% OF THE CONTINUOUS SPEED OF THE PRESS.

CONTINUOUS SPM	SGL. STROKE SPM
60	23
90	14
120	10

AIR OPERATED FLYWHEEL BRAKE, ELECTRICALLY INTERLOCKED SO BRAKE WILL ENGAGE WHEN MAIN MOTOR IS STOPPED.

FAST STOPPING ARRANGEMENT IN CLUTCH & BRAKE UNIT.

CONNECTION SCREWS MADE OF DUCTILE IRON

LAST REV. DATE: 8-17-84 CHG. BY: TJB			
THE MINSTER MACHINE CO. MINSTER, OHIO			
DATE: 2-20-84	BY: TJB	CHKD: TJB	SCALE: .09
GENERAL ASSEMBLY			
BASIC NO. E2-300-72-005-2000			
PART NO. V-1140-847			

1140-847_000