
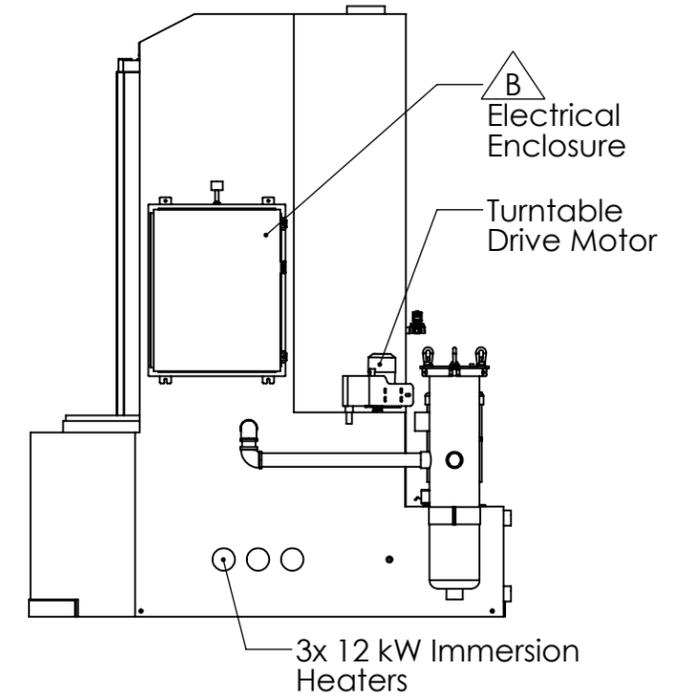
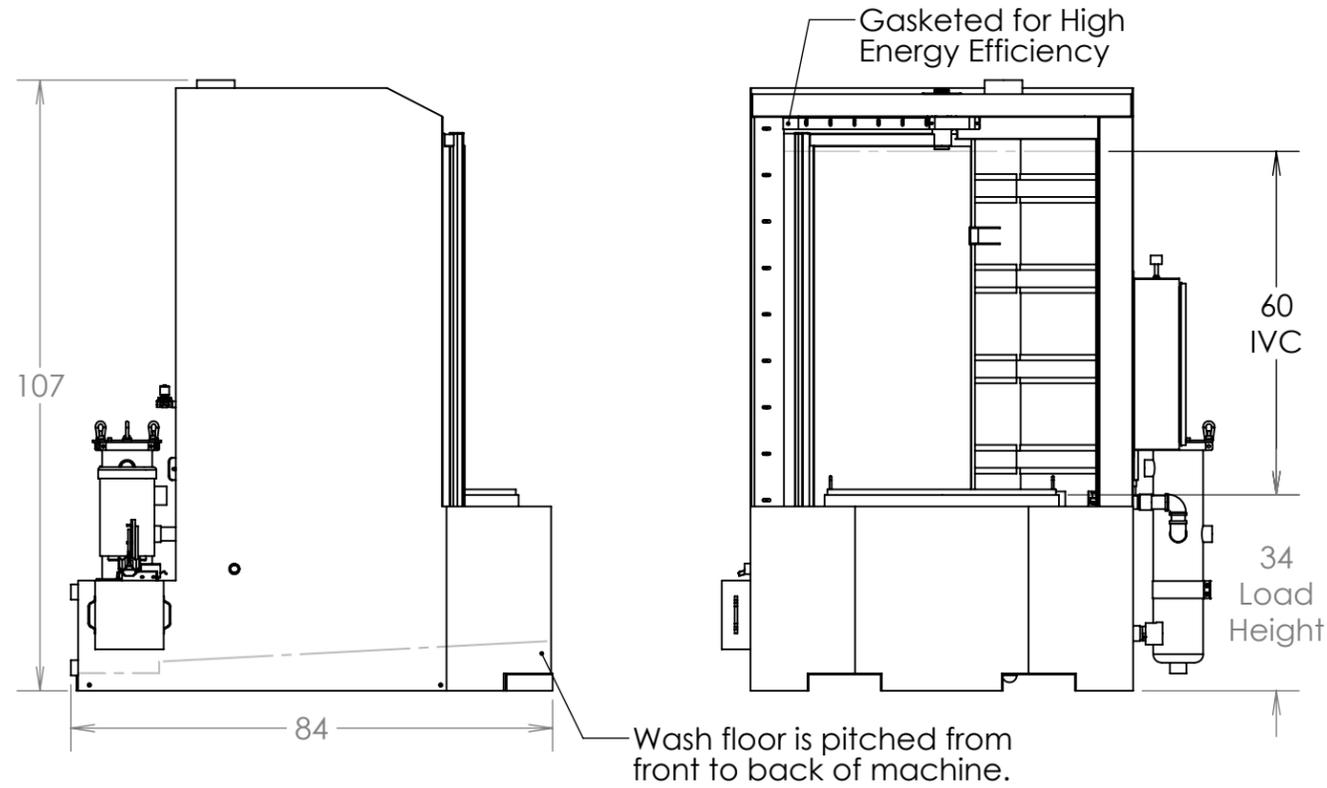
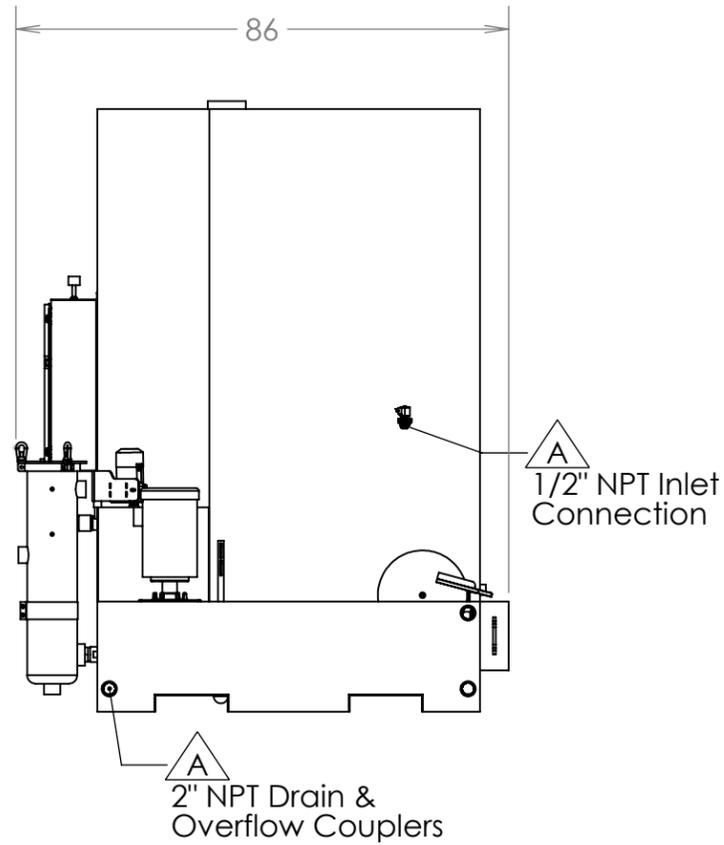
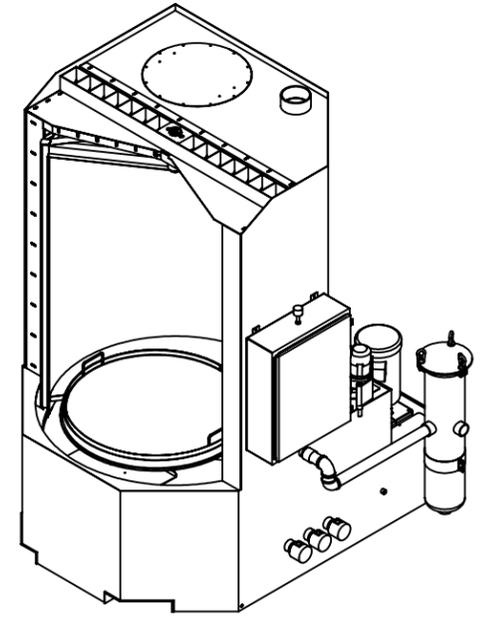


UTILITY REQUIREMENTS:

A WATER:
1/2" NPT CONNECTION
FACTORY PRESSURE
50" FROM GROUND

B ELECTRICAL:
460V/3 ϕ /60Hz
57 FULL LOAD AMPS

C WEIGHT:
220 GALLON WASH TANK
-3000 LBS. DRY (EST.)
-4850 LBS. WET (EST.)

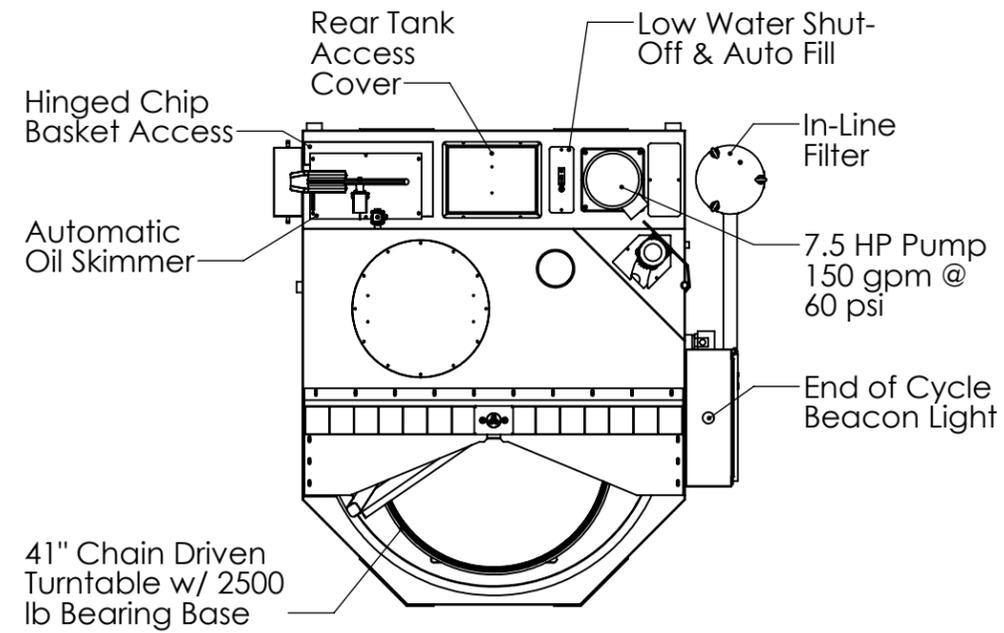

UNLESS OTHERWISE SPECIFIED:
DIMENSIONS ARE IN INCHES
TOLERANCES:
ANGULAR: MACH $\pm .5^\circ$
BEND $\pm 1^\circ$
TWO PLACE DECIMAL $\pm .05$
THREE PLACE DECIMAL $\pm .005$
INTERPRET GEOMETRIC TOLERANCING PER: ASME Y14.5
MATERIAL:
Mild Steel
WEIGHT:
FINISH:
DO NOT SCALE DRAWING

THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF BETTER ENGINEERING. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF BETTER ENGINEERING IS PROHIBITED.

NAME	DATE
DRAWN P. O'Donnell	7/30/2012
ENG APPR.	
MFG APPR.	

Better Engineering Mfg., Inc.
8361 Town Center Ct.
Baltimore, MD
21236-4964
410-931-0000
www.betterengineering.com

S/N: 21725

DESCRIPTION: General Facility Layout F-RD-4000-LXP Chemineer

SIZE:	DWG. NO.:	REV.:
B	91700	-

SCALE: 1:32 FILENAME: 91700 SHEET: 1 OF 1