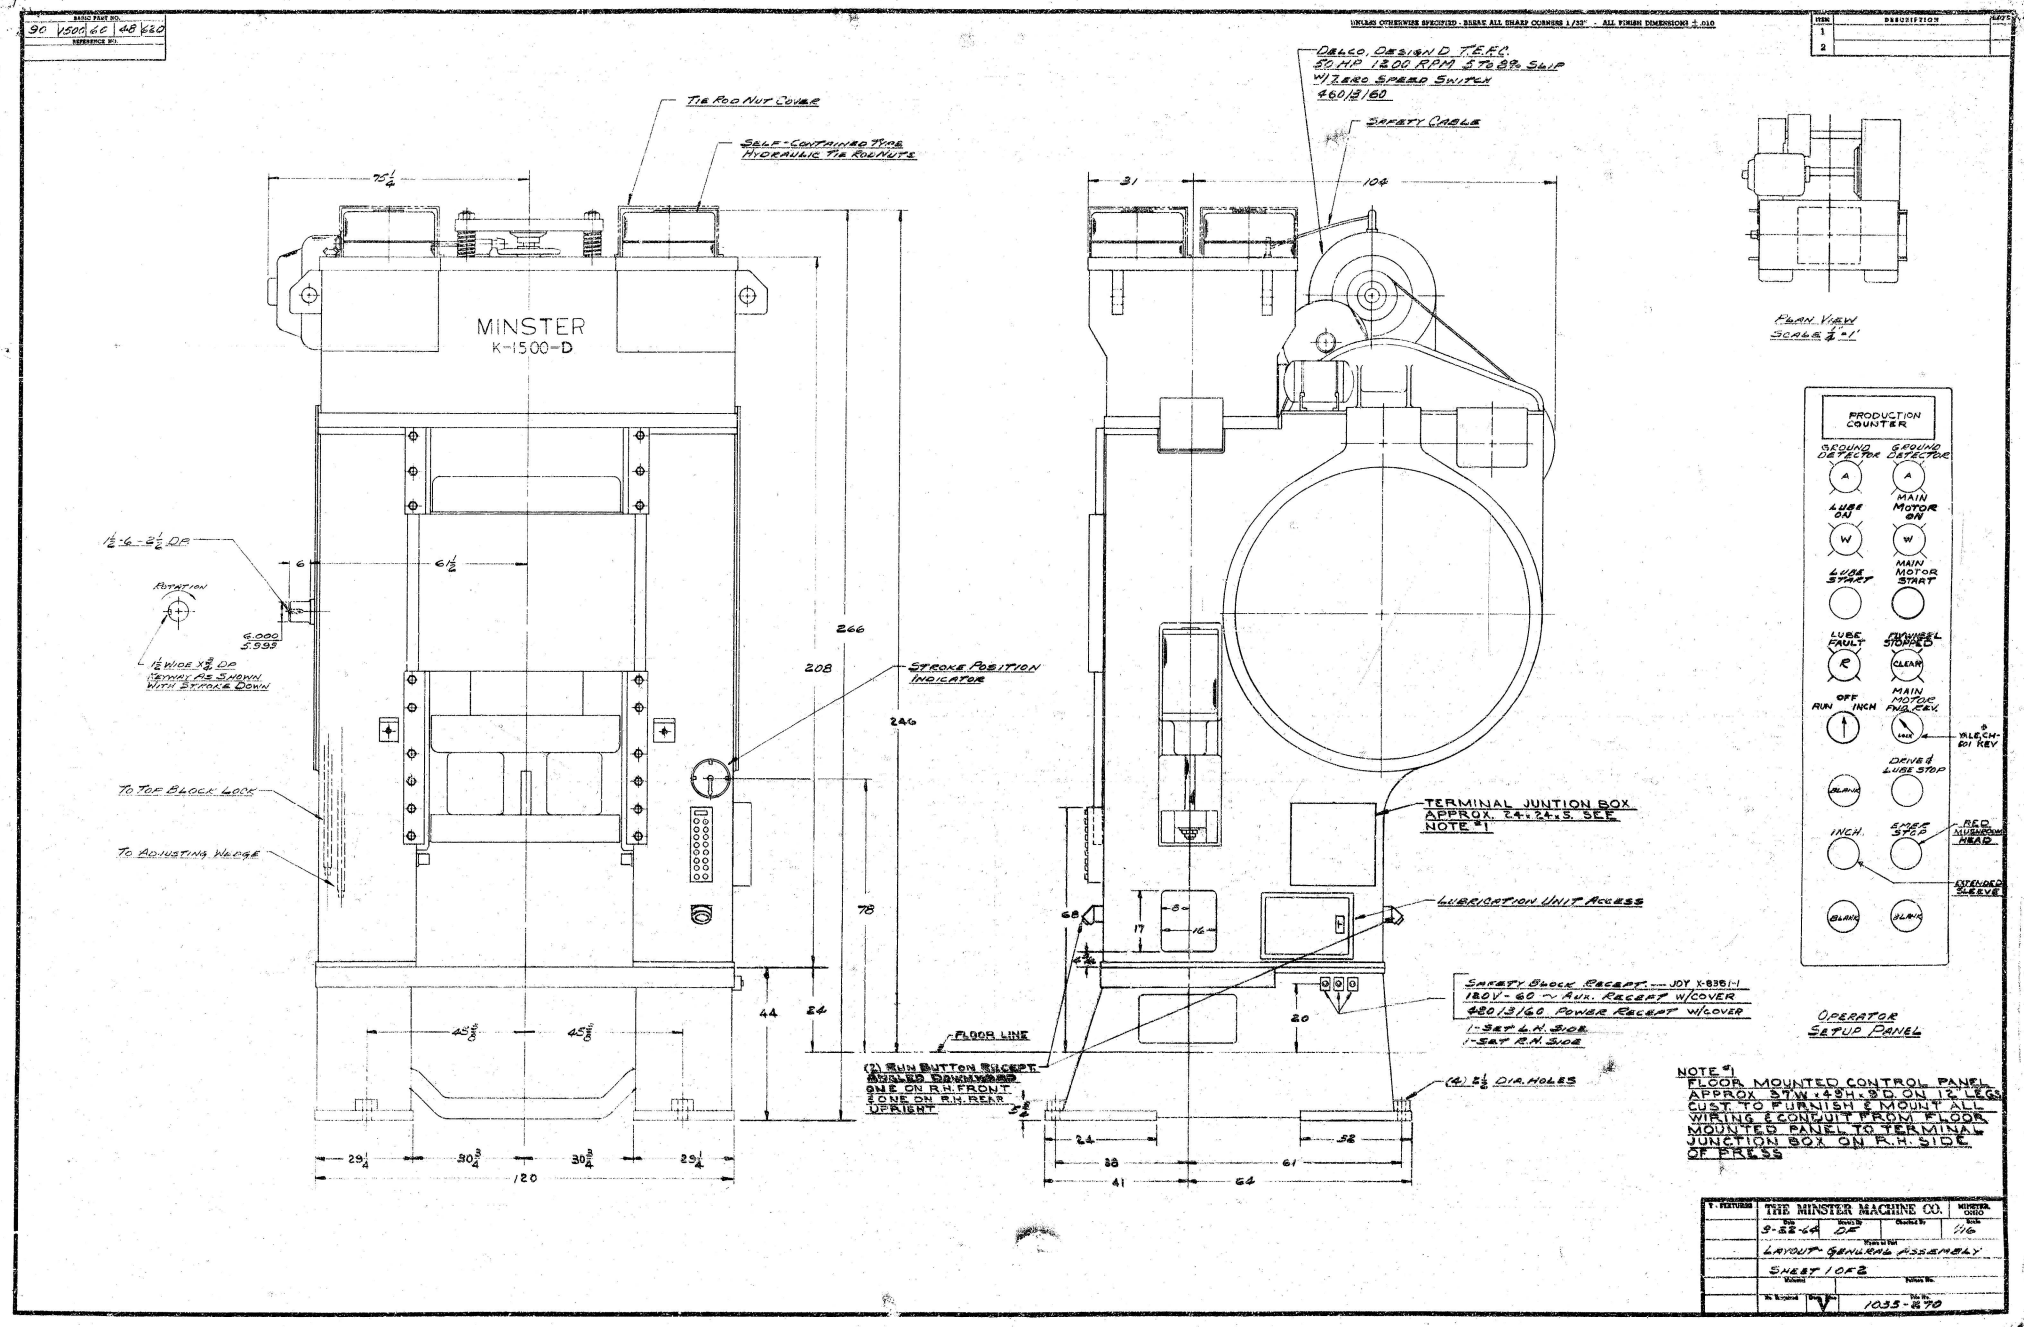
MINSTER
K-1500-D
TIE ROD NUT COVER
SELF-CONTAINED TIME HYDRAULIC TIE ROD NUTS
SAFETY CABLE
STROKE POSITION INDICATOR
TO TOP BLOCK LOCK
TO ADJUSTING WEDGE
ROTATION
TERMINAL JUNTION BOX APPROX. 24"x24"x5. SEE NOTE #1
LUBRICATION UNIT ACCESS
FLOOR LINE
(4) 2 1/2 DIA. HOLES
PLAN VIEW
PRODUCTION COUNTER
SOUND DETECTOR
LUBE OIL
MAIN MOTOR ON
LUBE START
MAIN MOTOR START
LUBE FAULT
FLYWHEEL STOPPED
CLEAR
OFF
RUN
INCH
MAIN MOTOR FWD. REV.
DRIVE LUBE STOP
INCH.
SPEED STOP
RED MUSHROOM HEAD
EXTENDED SLEEVE
OPERATOR SETUP PANEL
NOTE #1
FLOOR MOUNTED CONTROL PANEL APPROX 37W x 49H x 3D ON 12" LEGS CUST. TO FURNISH & MOUNT ALL WIRING & CONDUIT FROM FLOOR MOUNTED PANEL TO TERMINAL JUNCTION BOX ON R.H. SIDE OF PRESS
THE MINSTER MACHINE CO.
LAYOUT GENERAL ASSEMBLY
SHEET 1 OF 2
1035-270